



ELP3P2D

Starting torque and current curves

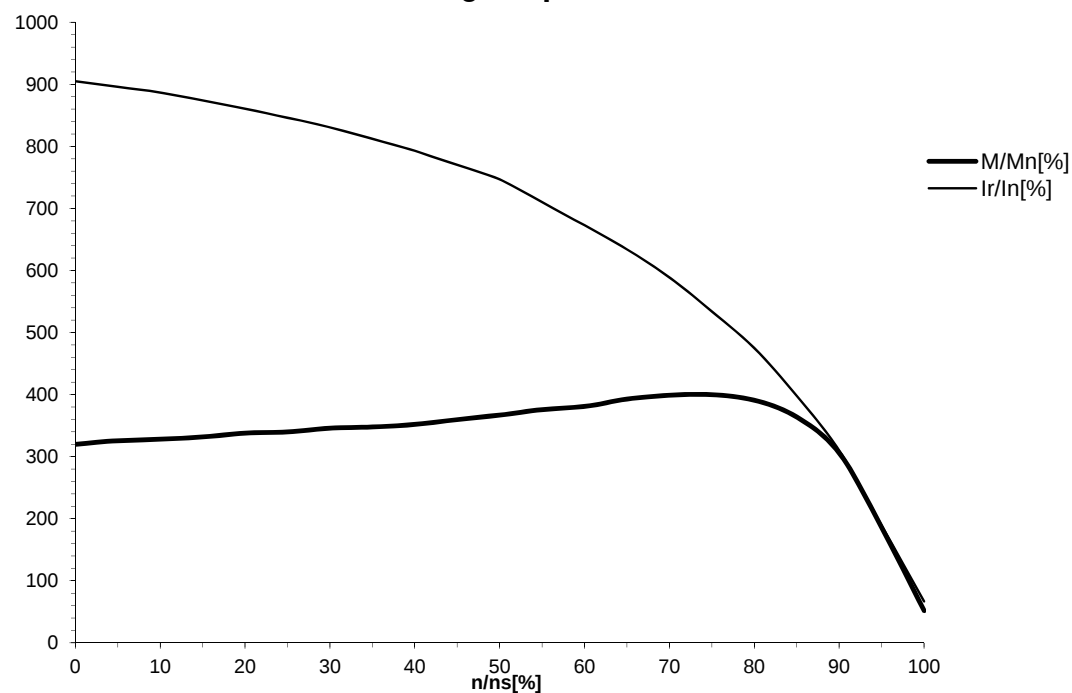


cos

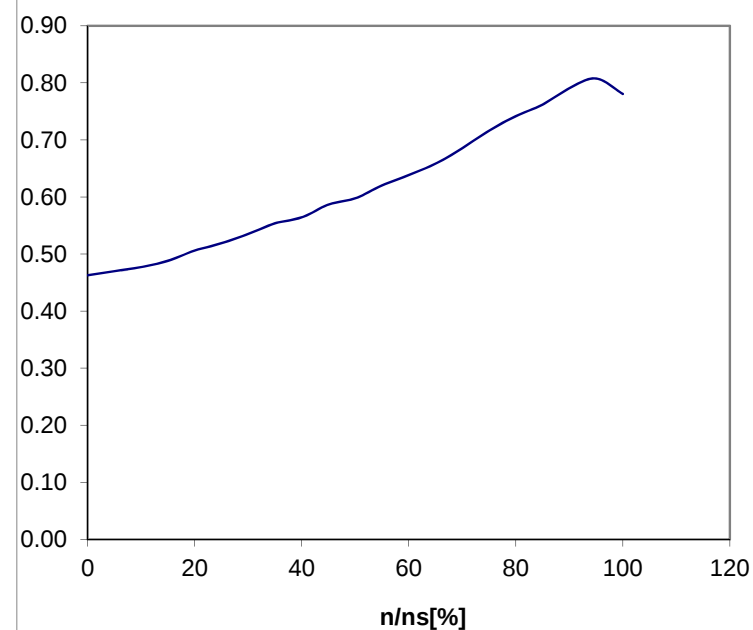

n/ns[%]	0	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
I/In[%]	905	896	887	874	861	846	831	812	793	770	747	710	673	634	589	534	475	398	310	189	67
M/Mn[%]	320	326	328	332	338	340	346	348	352	360	367	376	381	393	399	400	391	364	306	186	52
cos	0.46	0.47	0.48	0.49	0.51	0.52	0.54	0.55	0.56	0.59	0.60	0.62	0.64	0.66	0.69	0.72	0.74	0.76	0.79	0.81	0.78

Disclaimer: These Graph Datas are Typical unless noted otherwise.

ELP3P2D

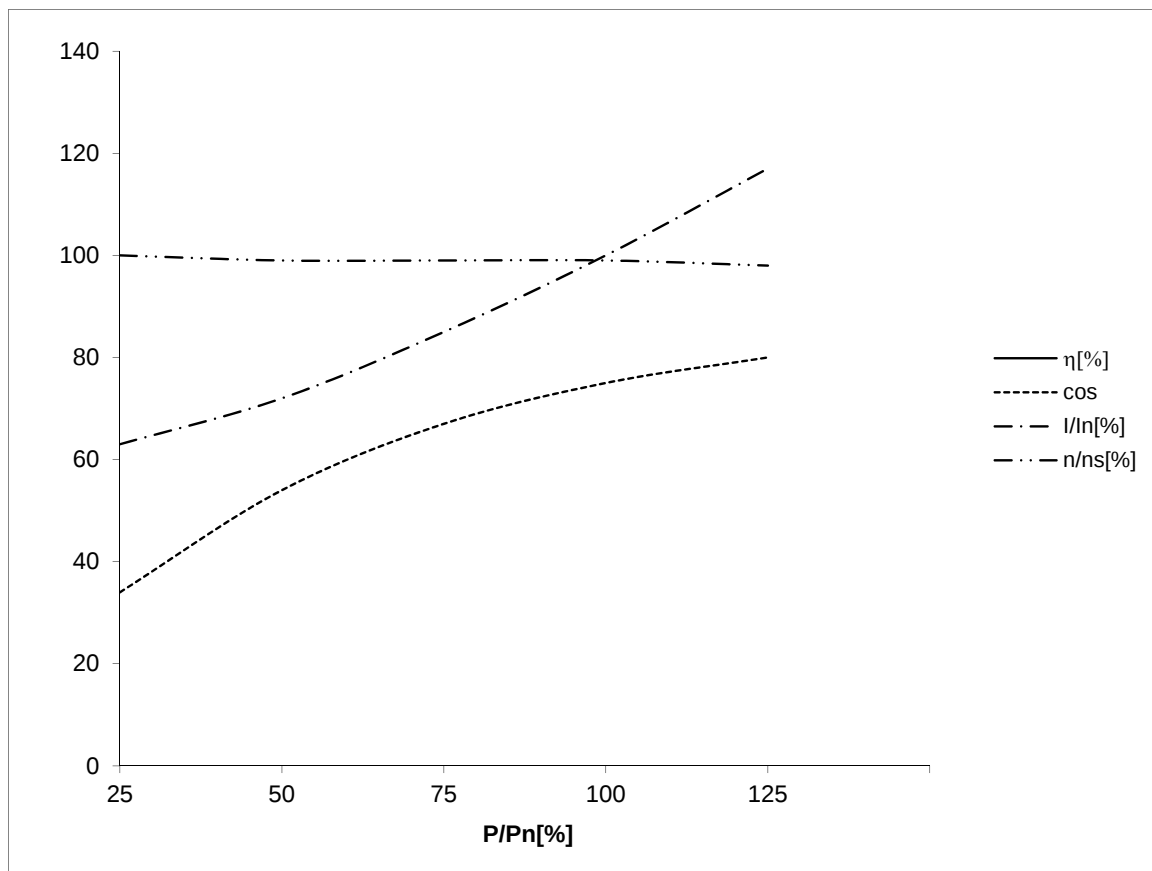

P/P _n [%]	25	50	75	100	125
h[%]	77.1	85.8	88.5	89.5	89.6
cosφ[%]	34	54	67	75	80
I/I _n [%]	63	72	85	100	117
n/n _s [%]	100	99	99	99	98

Disclaimer: These Graph Datas are Typical unless noted otherwise.