

MaxMotion

PERFORMANCE DATA SHEET

Meets or exceeds MEPS (Minimum Efficiency Performance Standards), as described by the US Department of Energy in docket 10CFR431 and Natural Resources Canada's Amendment 14

Catalogue #: **MPR-344CH**

HP	kW	Voltage	S.F. @ 60Hz	Efficiency	Power Factor	Frame	Design	L.R. Amps
0,75	0,56	575	1,15	80,5%	0,760	56HC	B	10

60 Hz								
FLA							Code	F.L. RPM
208	230	416	460	480	575	600		
/	/	/	/	/	0,91	/	L	1744

50 Hz								
HP	kW	FLA		S.F. @ 50Hz	Efficiency	Power Factor	Code	F.L. RPM
		190	380					
/	-	/	/	/	/	/	/	/

Wgt. Lbs	PH	Duty	Insul. Class	Amb.	Elevation	Temp. Rise° C
25,3	3	Cont.	F	40°C	1000M (3300 Ft)	49

% Efficiency		% Power Factor		Torque		Winding Resist. Ω	Safe Cold Start (Secs)
Full Load:	80,5%	Full Load:	0,76	Full Load Ft/Lbs	2,3		
3/4 Load:	79,3%	3/4 Load:	0,67	Locked Rotor %	222		
1/2 Load:	75,3%	1/2 Load:	0,55	Break Down %	227	50,1	12

Rotor Inertia Wk2 Lb-Ft2	Max Load Inertia Wk2 Lb-Ft2	Shaft Material	Frame Material	DE Bracket Type	ODE Bracket Type	Enclosure	NEMA Rating	Lead Wire Size
/	/	Steel	Rolled Steel	Aluminium Alloy		TEFC	IP55	16AWG

Ball Bearings		Grease	Mount Type	Orientation	Paint	Sound Pressure @ 3FT	Sound Power
DE	ODE						
6205	6203	Sealed Bearings	Rigid	Horizontal	Black	57	/

Inverter Duty. Motor meets MG1 parts 31.4.4.2	Constant Torque Range	Variable Torque Range	Constant HP RPM
	10:1	20:1	2700

WIRING CONNECTION DIAGRAM :	D
56C, Single Voltage, DOL, 3 Leads WYE Connection 575 VAC 3 phase 1 2 3 Line	


Date: 2024-05-01
 Customer: _____
 Contact: _____
 Submittee: J.C. Lavallée

Catalogue #: MPR-344CH


Meets or exceeds MEPS (Minimum Efficiency Performance Standards), as described by the US Department of Energy in docket 10CFR431 and Natural Resources Canada's Amendment 14

HP	VAC	RPM	Enclosure	Frame	Frequency	Design	Poles	LR Code Letter	Insulation Class	Temp. Rise °C
0,75	575	1744	TEFC	56HC	60	B	4	L	F	49
	0Hz	6Hz	15Hz	30Hz	45Hz	60Hz	75Hz	90Hz	105Hz	120Hz
Amps	0,91	0,91	0,91	0,91	0,91	0,91	0,91	0,91	0,91	0,91
RPM	0	174,4	436	872	1308	1744	2180	2616	3052	3488
Torq ft.lb	1,81	1,81	2,26	2,26	2,26	2,26	1,81	1,51	1,29	1,13
Peak Tq ft.lb	2,41	4,82	4,82	4,82	4,82	4,82	3,86	3,21	2,76	2,41
HP	0	0,1	0,2	0,4	0,6	0,8	0,8	0,8	0,8	0,8
	Locked Rotor	Pull-Up	Breakdown	Rated Load	Idle	Duty	S. F.	Ambient	Elevation	dBA @ 1M
Speed (RPM)	0,0	756	1440	1744	1800	Continuous	1,15	40°C	3,300 ft	57
Current (Amps)	10,0	8,5	6,0	0,9	0,6	VFD Rating: Meets MG1 parts 31.4.4.2				
Torque (ft-lbs)	5,0	4,3	5,1	2,3	0,0	C.T.	10:1	V.T.	20:1	

Motor Speed Data

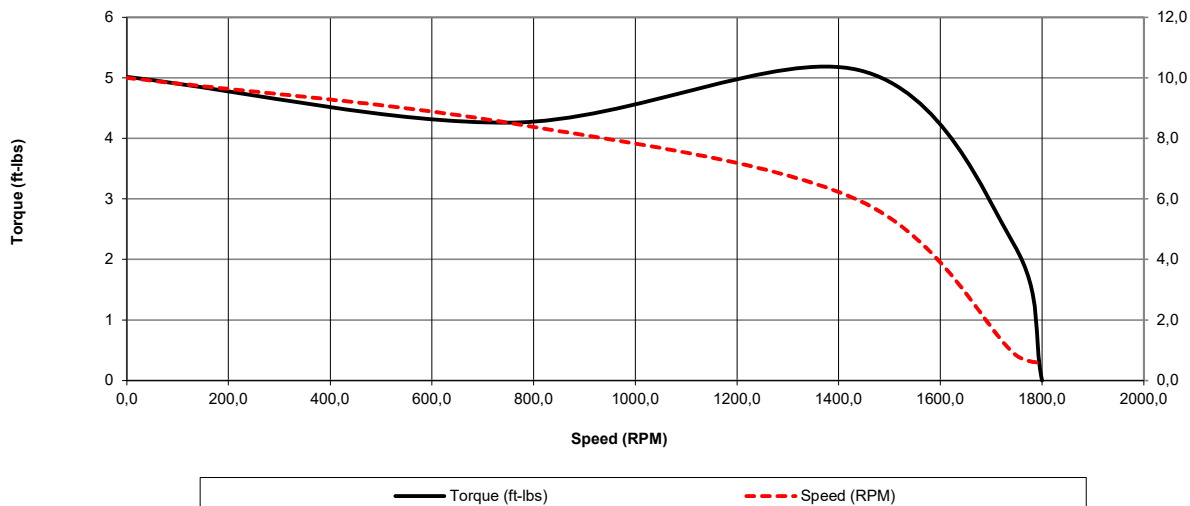

Motor Torque Capability vs RPM

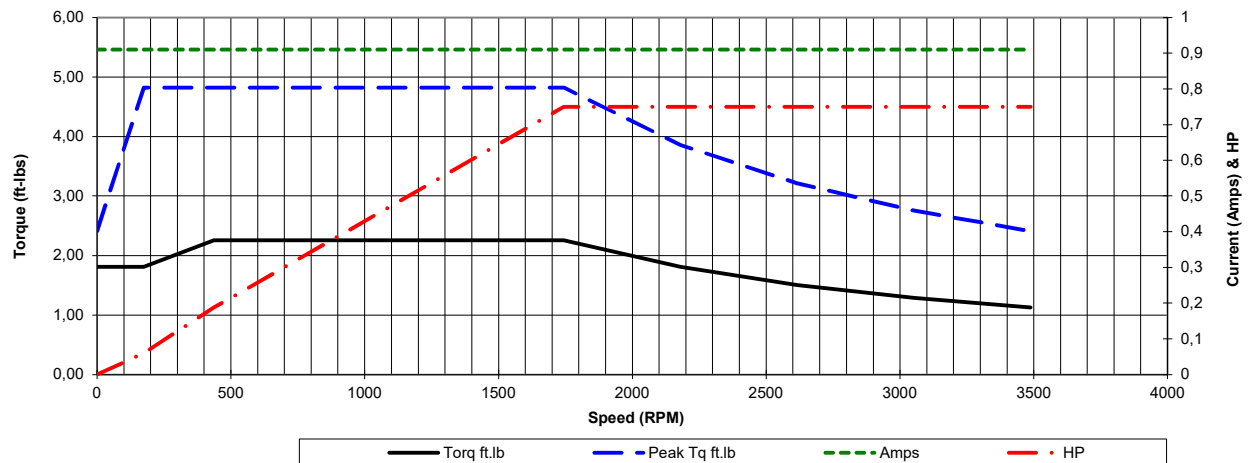




Date: 2024-05-01
Customer:
Contact:
Submittee: J.C. Lavallée

Catalogue #: MPR-344CH

Meets or exceeds MEPS (Minimum Efficiency Performance Standards), as described by the US Department of Energy in docket 10CFR431 and Natural Resources Canada's Amendment 14

HP	VAC	RPM	Enclosure	Frame	Frequency	Design	Poles	LR Code Letter	Insulation Class	Temp. Rise °C
0,75	575	1744	TEFC	56HC	60	B	4	L	F	49
Load %	0%	25%	50%	75%	100%	125%	150%			
Amps	0,58	0,64	0,67	0,77	0,91	1,14	1,37			
Torq ft/lbs	0	0,55	1,11	1,68	2,26	2,85	3,44			
RPM	0	1786	1772	1758	1744	1730	1716			
Eff	0	66,50	76,23	81,36	80,50	79,64	77,36			
PF	0	33,0	55	67	76,0	77,5	79,8			
Speed (RPM)	Locked Rotor	Pull-Up	Breakdown	Rated Load	Idle	Duty	S. F.	Ambient	Elevation	dBA @ 1M
Speed (RPM)	0	756	1440	1744	1800	Continuous	1,15	40°C	3,300 ft	57
Current (Amps)	10	8,5	6,0	0,91	0,578	VFD Rating: Meets MG1 parts 31.4.4.2				
Torque (ft-lbs)	5,01	4,26	5,13	2,26	0,0	C.T.	10:1	V.T.	20:1	

Motor Speed Data

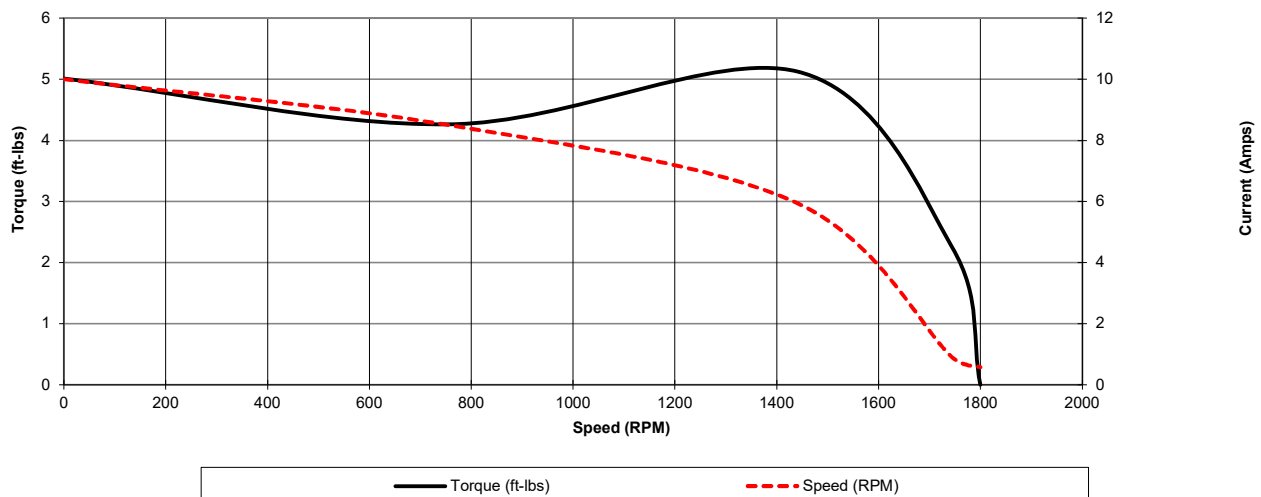

443T - 464T Dual Voltage SGL 3 Leads WYE Connection

Motor Load Data

