



PERFORMANCE DATA SHEET

Meets or exceeds MEPS (Minimum Efficiency Performance Standards), as described by the US Department of Energy in docket 10CFR431 and Natural Resources Canada's Amendment 14

Catalogue #:

MTR-1004FDH

HP	kW	Voltage	Frequency	Efficiency	Power Factor	Frame	Design	F.L. RPM
10	7,46	208 - 230	60Hz	88,0%	0,970	215T	B	1770

FLA			Service Factor	N.L. Amps @ 115V	N.L. Amps @ 230V	KVA Code	L.R. Amps @ 15v	L.R. Amps @ 230v
115	208	230						
/	45,1	38,20	1	/	10,1	G	/	230

Start Cap.	Run Cap.	Main Winding Ω 115V @ 25°C	Main Winding Ω 230V @ 25°C	Auxillary Winding Ω @ 25°C	Safe Cold Start (Secs)
800 μ f/300vac	90 μ f/450vac	/	0,230	0,490	12

Wgt. Lbs	PH	Duty	Insul. Class	Amb.	Elevation	Temp. Rise° C
172	1	Cont.	F	40°C	1000M (3,300 Ft)	78

% Efficiency		Power Factor		Torque		Protection
Full Load:	88,0%	Full Load:	0,97	Full Load Ft/Lbs	29,7	
3/4 Load:	76,9%	3/4 Load:	0,94	Locked Rotor %	135	
1/2 Load:	56,9%	1/2 Load:	0,92	Break Down %	136	

Rotor Inertia Wk2 Lb-Ft2	Max Load Inertia Wk2 Lb-Ft2	Shaft Material	Frame Material	DE Bracket Type	ODE Bracket Type	Enclosure	NEMA Rating	Lead Wire Size
/	/	Steel	Rolled Steel	Aluminium Alloy		TEFC	IP55	/

Ball Bearings		Grease	Mount Type	Orientation	Paint	Sound Pressure 3FT @	Sound Power
DE	ODE						
6206	6205	Sealed Bearings	Rigid	Horizontal	Black	75	/

WIRING CONNECTION DIAGRAM :


E

213/5T, Single Voltage, 4 Leads Connection Diagram
Single phase 208 - 230 VAC
Low Nameplate Voltage High Nameplate Voltage

Color Code
T1 = Blue
T4 = Yellow
T5 = Black
T8 = Red

CCW

CW



* Reverse rotation by inverting T5 & T8 connection leads.




Date: 2024-09-18
Customer:
Contact:
Submittee: J.C. Lavallée

Catalogue #: MTR-1004FDH

Meets or exceeds MEPS (Minimum Efficiency Performance Standards), as described by the US Department of Energy in docket 10CFR431 and Natural Resources Canada's Amendment 14

HP	VAC	RPM	Enclosure	Frame	Frequency	Design	Poles	LR Code Letter	Insulation Class	Temp. Rise °C
10	230	1770	TEFC	215T	60	B	4	G	F	78
Load %	0%	25%	50%	75%	100%	125%	150%			
Amps	27,12	29,03	30,98	33,62	38,20	47,75	57,30			
Torq ft/lbs	0	7,32	14,71	22,16	29,67	37,25	44,89			
RPM	0	1792,5	1785	1777,5	1770	1762,5	1755			
Eff	0	31,03	56,93	76,91	88,00	89,32	92,14			
PF	0,00	90,00	91,96	94,09	97,00	95,06	92,15			
Speed (RPM)	0	900	1440	1770	1800	Continuous	1	40°C	3,300 ft	75
Current (Amps)	230	195,5	136,9	38,2	27,122	VFD Rating: Meets MG1 parts 31.4.4.2				
Torque (ft-lbs)	40,06	34,05	40,35	29,67	0,0	C.T.		V.T.		

Motor Speed Data

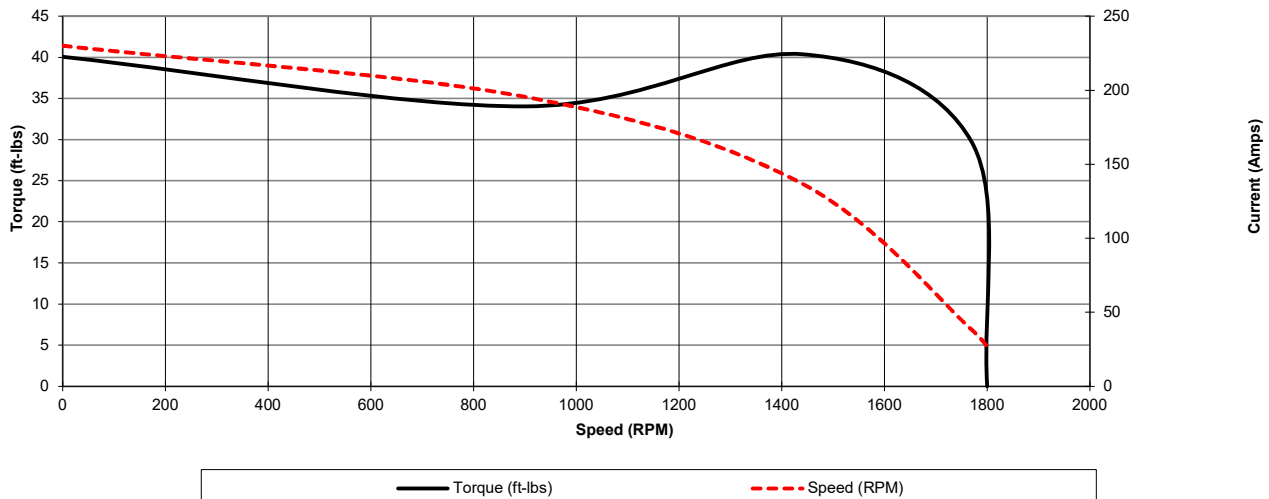

Motor Load Data

