


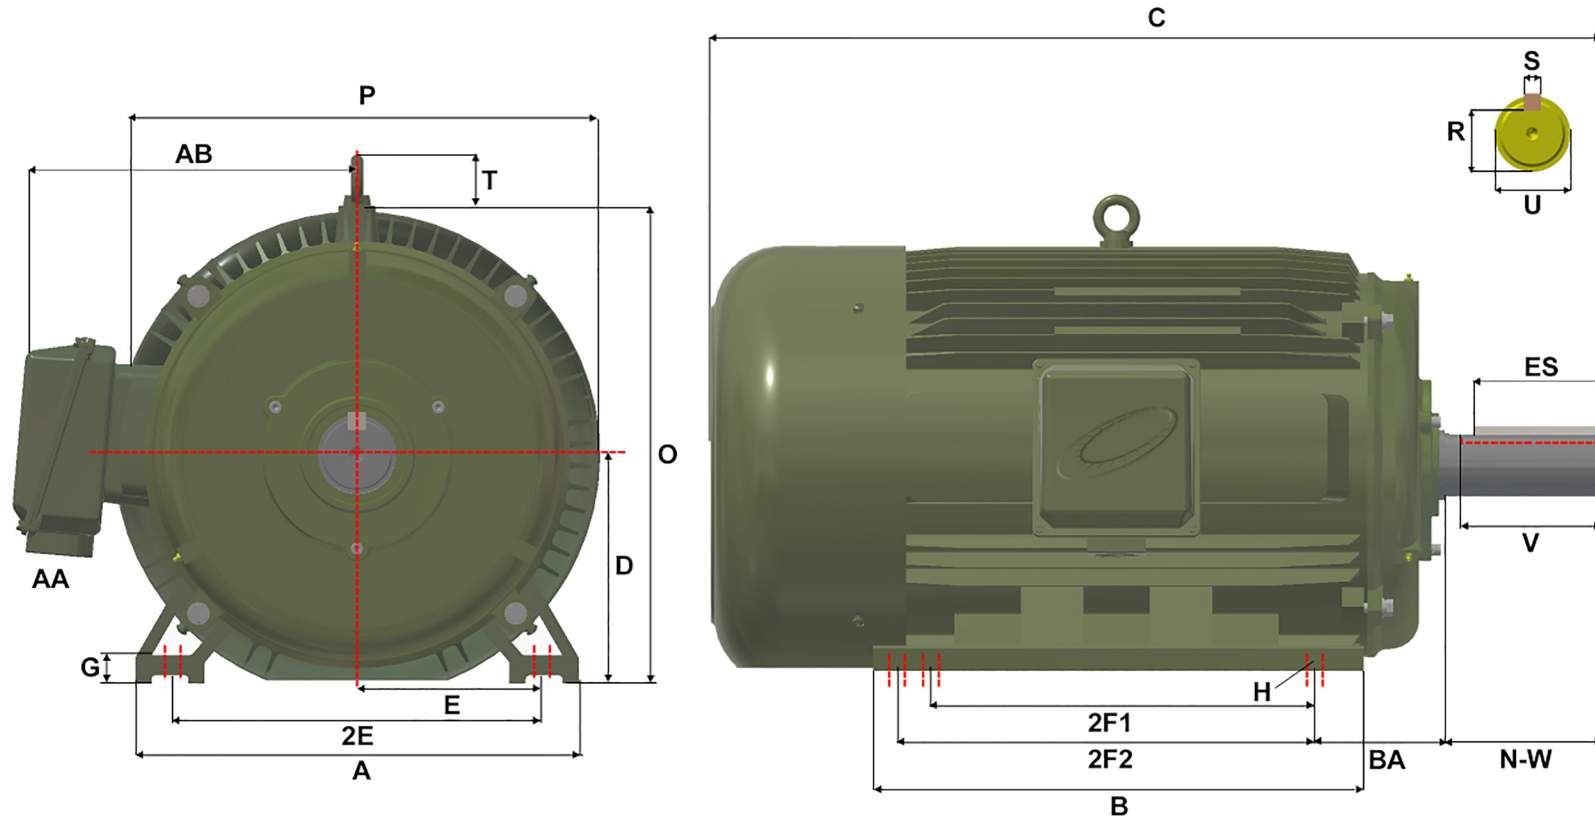

| Version: 2WTI                                                                                                        |       |       | Revised: 08-10-2019 |       |       | HP    | RPM   | FRAME | ENCLOSURE | MPP/MQP-106 |       |       |
|----------------------------------------------------------------------------------------------------------------------|-------|-------|---------------------|-------|-------|-------|-------|-------|-----------|-------------|-------|-------|
| Customer is responsible in determining that Max Motion product will fit/perform suitably in the intended application |       |       |                     |       |       | 300   | 3600  | 449TS | TEFC      |             |       |       |
| A                                                                                                                    | B     | C     | D                   | E     | 2E    | 2F1   | 2F2   | G     | H         | O           | P     | R     |
| 21.70                                                                                                                | 31.40 | 49.10 | 11.00               | 9.00  | 18.00 | 20.00 | 25.00 | 1.35  | 6 X 0.81  | 23.00       | 23.40 | 2.021 |
| S                                                                                                                    | T     | U     | V                   | AA    | AB    | BA    | ES    | N-W   |           |             |       |       |
| 0.625                                                                                                                | 3.00  | 2.375 | 4.50                | 3 NPT | 19.90 | 7.50  | 3.03  | 4.75  |           |             |       |       |