



## PERFORMANCE DATA SHEET

Meets or exceeds MEPS, as described by the US DOE in docket 10CFR431 and NRCAN's Amendment 14

Catalogue #: **MQS-6312**

HP	kW	Voltage	S.F. @ 60Hz	EFF.	P.F.	Frame	Design	L.R. Amps
0,25	0,19	230 / 460	1,15	73,0%	0,605	63	B	6

60 Hz								
FLA							Code	F.L. RPM
208	230	416	460	480	575	600		
/	1,06	/	0,53	/	/	/		

50 Hz							
FLA			S.F. @ 50Hz	Efficiency	Power Factor	Code	F.L. RPM
190	380	415					
1,3	0,62	/					


Wgt. Lbs	PH	Duty	Insul. Class	Amb.	Elevation	Temp. Rise° C
17,6	3	Cont.	F	40°C	1000M (3300 Ft)	30

% Efficiency		% Power Factor		Torque		Winding Resist. Ω	Safe Cold Start (Secs)
Full Load:	73,0%	Full Load:	0,61	Full Load Ft/Lbs	0,4		
3/4 Load:	70,1%	3/4 Load:	0,51	Locked Rotor %	288		
1/2 Load:	63,6%	1/2 Load:	0,39	Break Down %	388		

Rotor Inertia Wk2 Lb-Ft2	Max Load Inertia Wk2 Lb-Ft2	Shaft Material	Frame Material	DE Bracket Type	ODE Bracket Type	Enclosure	NEMA Rating	Lead Wire Size
/	/	Stainless Steel 304				TENV	IP66	/

Ball Bearings		Grease	Mount Type	Orientation	Paint	Sound Pressure @ 3FT	Sound Power
DE	ODE						
6202	6202	Sealed Bearings	Rigid	Horizontal	-	/	/

Inverter Duty. Motor meets MG1 parts 31.4.4.2	Constant Torque Range	Variable Torque Range	Constant HP RPM
	10:1	20:1	0,25

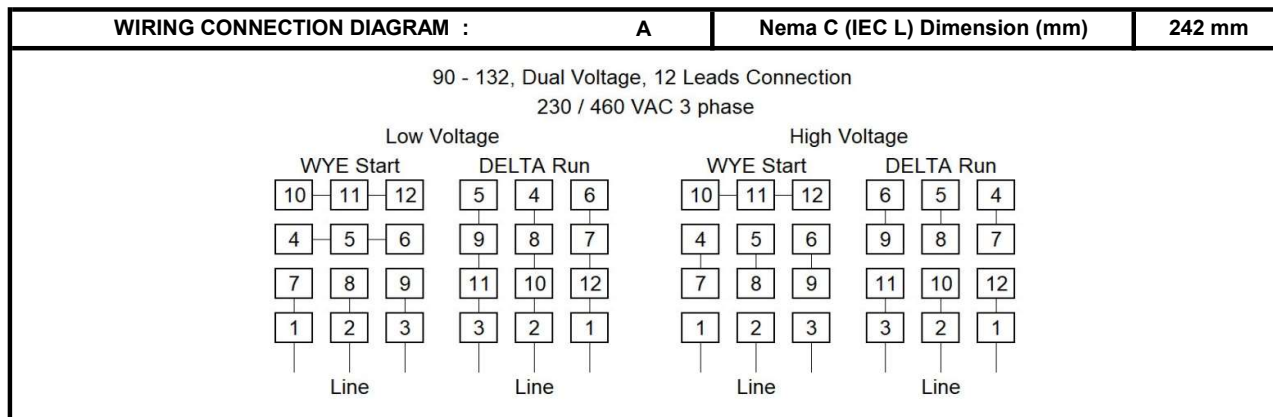

Date: 2023-12-21  
 Customer: \_\_\_\_\_  
 Contact: \_\_\_\_\_  
 Submittee: J.C. Lavallée

Catalogue #: MQS-6312

Meets or exceeds MEPS, as described by the US DOE in docket 10CFR431 and NRCan's Amendment 14


HP	VAC	RPM	Enclosure	Frame	Frequency	Design	Poles	LR Code Letter	Insulation Class	Temp. Rise °C
0,25	460	3500	TENV	63	60	B	2	K	F	30


	0Hz	6Hz	15Hz	30Hz	45Hz	60Hz	75Hz	90Hz	105Hz	120Hz
Amps	0,53	0,53	0,53	0,53	0,53	0,53	0,53	0,53	0,53	0,53
RPM	0	350	875	1750	2625	3500	4375	5250	6125	7000
Torq ft.lb	0,30	0,30	0,38	0,38	0,38	0,38	0,30	0,25	0,21	0,19
Peak Tq ft.lb	0,55	1,10	1,10	1,10	1,10	1,10	0,88	0,74	0,63	0,55
HP	0	0,0	0,1	0,1	0,2	0,3	0,3	0,3	0,3	0,3

	Locked Rotor	Pull-Up	Breakdown	Rated Load	Idle	Duty	S. F.	Ambient	Elevation	dBa @ 1M
Speed (RPM)	0,0	1512	2880	3500	3600	Cont.	1,15	40°C	3,300 ft	/
Current (Amps)	6,0	5,1	3,6	0,5	0,4	VFD Rating: Meets MG1 parts 31.4.4.2				
Torque (ft-lbs)	1,1	0,9	1,5	0,4	0,0	C.T.	10:1	V.T.	20:1	

Motor Speed Data

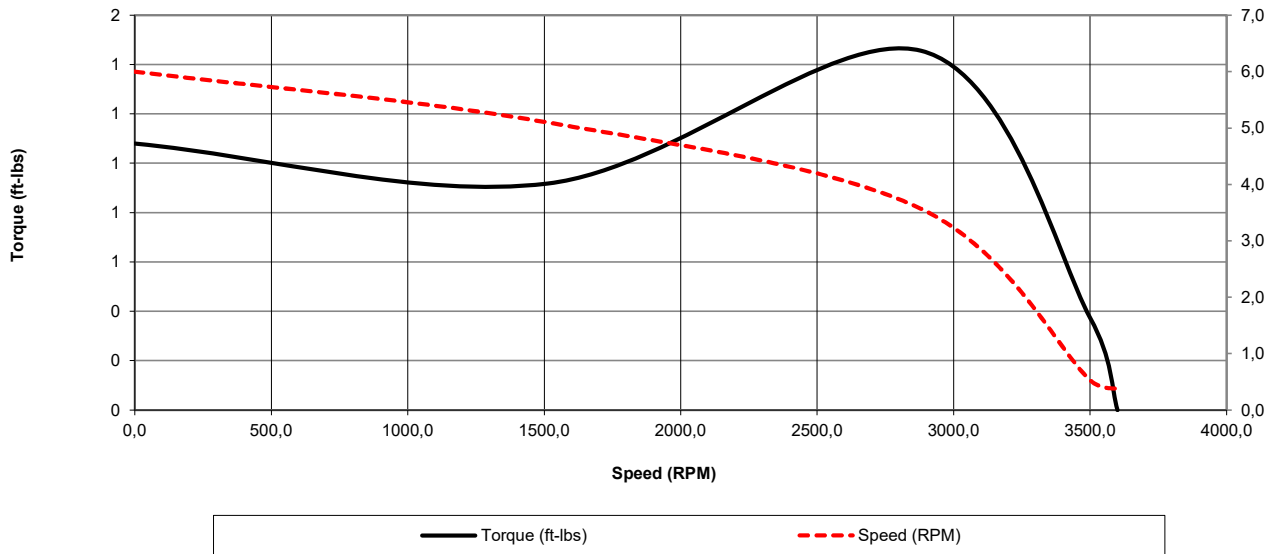

Motor Torque Capability vs RPM

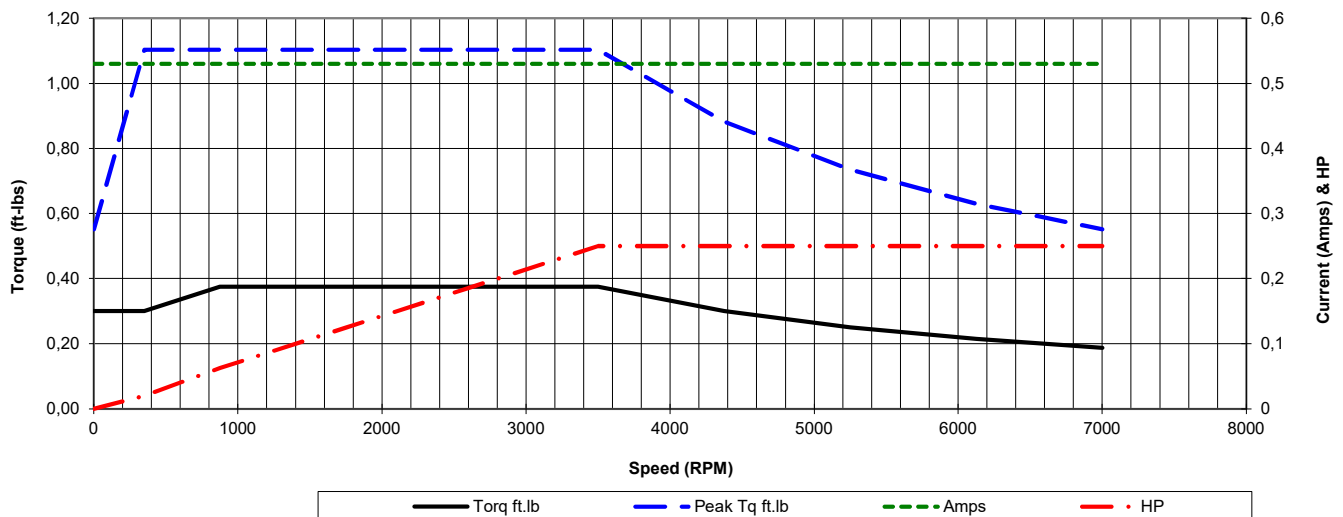

# MaxMotion

Date: 2023-12-21  
 Customer: \_\_\_\_\_  
 Contact: \_\_\_\_\_  
 Submittee: J.C. Lavallée

Catalogue #: **MQS-6312**

Meets or exceeds MEPS, as described by the US DOE in docket 10CFR431 and NRCan's Amendment 14

HP	VAC	RPM	Enclosure	Frame	Frequency	Design	Poles	LR Code Letter	Insulation Class	Temp. Rise °C
0,25	460	3500	TENV	63	60	B	2	K	F	30

Load %	0%	25%	50%	75%	100%	125%	150%
Amps	0,38	0,40	0,43	0,47	0,53	0,66	0,80
Torq ft/lbs	0	0,09	0,18	0,28	0,38	0,47	0,57
RPM	0	3575	3550	3525	3500	3475	3450
Eff	0	55,76	63,58	70,06	73,00	71,57	69,53
PF	0	26,0	39,204	51,1225	60,5	61,7	63,5

	Locked Rotor	Pull-Up	Breakdown	Rated Load	Idle	Duty	S. F.	Ambient	Elevation	dBA @ 1M
Speed (RPM)	0	1512	2880	3500	3600	Cont.	1,15	40°C	3,300 ft	/
Current (Amps)	6	5,1	3,6	0,53	0,3763	VFD Rating: Meets MG1 parts 31.4.4.2				
Torque (ft-lbs)	1,08	0,92	1,46	0,38	0,0	C.T.	10:1	V.T.	20:1	

