



**PERFORMANCE DATA SHEET
NEMA PREMIUM NR CAN NEMA 12 - 12**

Catalogue #: **MPOP-82**

HP	kW	Voltage	S.F. @ 60Hz	EFF.	P.F.	Frame	Design	L.R. Amps
125	93.25	575	1.15	95.4%	0.87	405T	B	726

60 Hz								
FLA							Code	F.L. RPM
208	230	416	460	480	575	600		
/	/	/	/	/	112.8	108.30	G	1785

50 Hz								
FLA			S.F. @ 50Hz		Efficiency	Power Factor	Code	F.L. RPM
190	380	415						
/	/	/	/		/	/	/	/


Wgt. Lbs	PH	Duty	Insul. Class	Amb.	Elevation	Temp. Rise° C
1342	3	Cont.	F	40°C	1000M (3,300 Ft)	< 80

% Efficiency		% Power Factor		Torque			
Full Load:	95.4%	Full Load:	0.87	Full Load Ft/Lbs	367.8	Winding Resist. Ω	Safe Cold Start (Secs)
3/4 Load:	95.0%	3/4 Load:	0.86	Locked Rotor %	150		
1/2 Load:	94.5%	1/2 Load:	0.81	Break Down %	250		

Rotor Inertia Wk2 Lb-Ft2	Max Load Inertia Wk2 Lb-Ft2	Shaft Material	Frame Material	DE Bracket Type	ODE Bracket Type	Enclosure	NEMA Rating	Lead Wire Size
40.34	675	Standard	Cast Iron	Standard	Standard	ODP	IP23	5AWG

Ball Bearings		Grease	Mount Type	Orientation	Paint	Sound Pressure @ 3FT	Sound Power
DE	ODE						
NU318	6314						
		Mobil PolyrexEm	Rigid	Horizontal	Green	88	100

Inverter Duty, Motor meets MG1 parts 31.4.4.2	VFD SF	Constant Torque Range	Variable Torque Range	Constant HP RPM
	1.00	10:1	20:1	2700

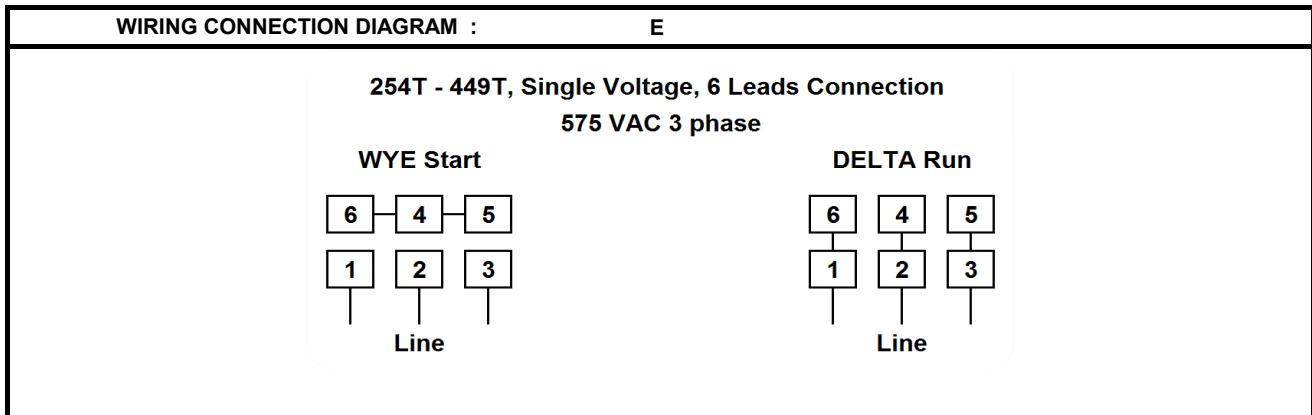


Date: 2021-04-30
 Customer:
 Contact:
 Submittee: J.C. Lavallée


Catalogue #: MPOP-82

NEMA PREMIUM NR CAN NEMA 12 - 12										
HP	VAC	RPM	Enclosure	Frame	Frequency	Design	Poles	LR Code Letter	Insulation Class	Temp. Rise °C
125	575	1785	ODP	405T	60 Hz	B	4	G	F	< 80
	0Hz	6Hz	15Hz	30Hz	45Hz	60 Hz	75Hz	90Hz	105Hz	120Hz
Amps	112.8	112.8	112.8	112.8	112.8	112.8	112.8	112.8	112.8	112.8
RPM	0	178.5	446.25	892.5	1338.75	1785	2231.25	2677.5	3123.75	3570
Torq ft.lb	294.23	367.79	367.79	367.79	367.79	367.79	294.23	245.19	210.16	183.89
Peak Tq ft.lb	413.76	827.52	827.52	827.52	827.52	827.52	662.02	551.68	472.87	413.76
HP	0	12.5	31.3	62.5	93.8	125.0	125.0	125.0	125.0	125.0
	Locked Rotor	Pull-Up	Breakdown	Rated Load	Idle	Duty	S. F.	Ambient	Elevation	dBA @ 1M
Speed (RPM)	0.0	756	1440	1785	1800	Continuous	1.15	40°C	3,300 ft	88
Current (Amps)	726.0	617.1	432.0	112.8	28.3	VFD Rating: Meets MG1 parts 31.4.4.2				
Torque (ft-lbs)	551.7	413.8	919.5	367.8	0.0	C.T.	10:1	V.T.	20:1	VFD SF 1.00

Motor Speed Data

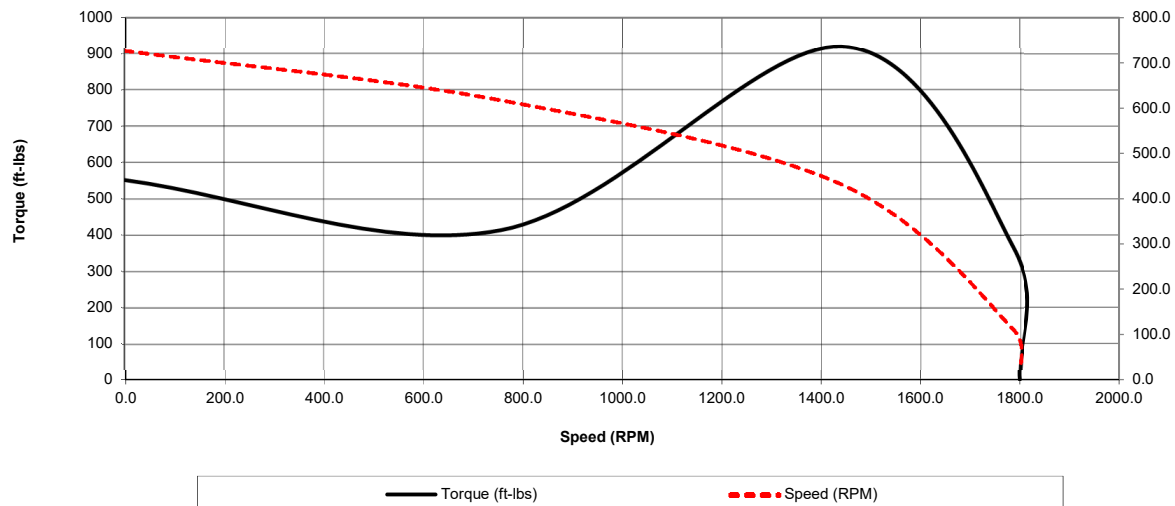

Motor Torque Capability vs RPM

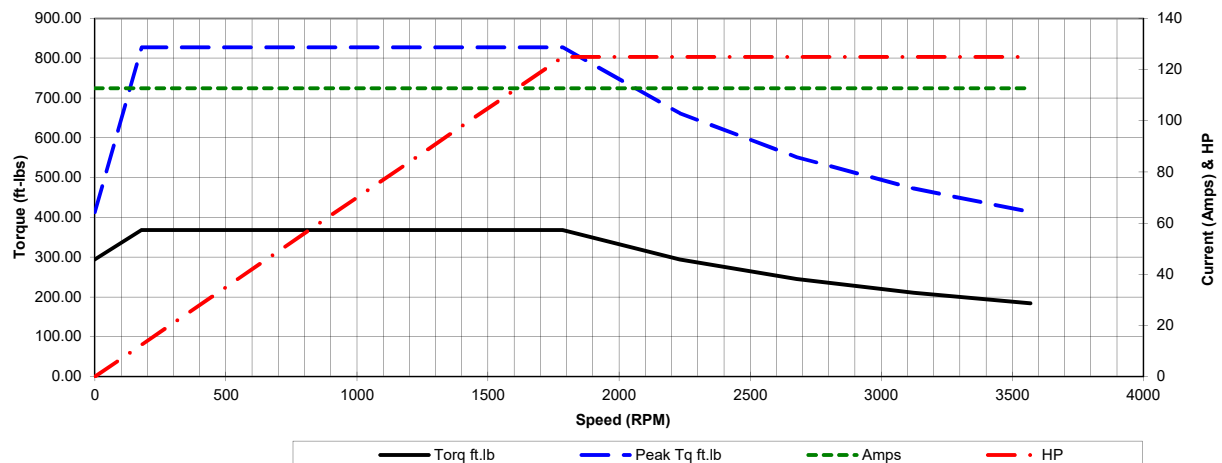




Date: 2021-04-30
 Customer:
 Contact:
 Submittee: J.C. Lavallée

Catalogue #: MPOP-82

NEMA PREMIUM NR CAN NEMA 12 - 12										
HP	VAC	RPM	Enclosure	Frame	Frequency	Design	Poles	LR Code Letter	Insulation Class	Temp. Rise °C
125	575	1785	ODP	405T	60 Hz	B	4	G	F	< 80
Load %	0%	25%	50%	75%	100%	125%	150%			
Amps	28.31	40.33	61.93	86.29	112.80	141.01	171.78			
Torq ft/lbs	0	91.37	183.12	275.26	367.79	460.70	554.01			
RPM	0	1796.25	1792.5	1788.75	1785	1781.25	1777.5			
Eff	0	86.25	94.50	95.00	95.40	95.40	95.40			
PF	0	67.3	81	86	87	87	85.7			
	Locked Rotor	Pull-Up	Breakdown	Rated Load	Idle	Duty	S. F.	Ambient	Elevation	dBA @ 1M
Speed (RPM)	0	756	1440	1785	1800	Continuous	1.15	40°C	3,300 ft	88
Current (Amps)	726	617.1	432.0	112.8	28.3128	VFD Rating: Meets MG1 parts 31.4.4.2				
Torque (ft-lbs)	551.68	413.76	919.47	367.79	0.0	C.T.	10:1	V.T.	20:1	VFD SF 1.00

Motor Speed Data

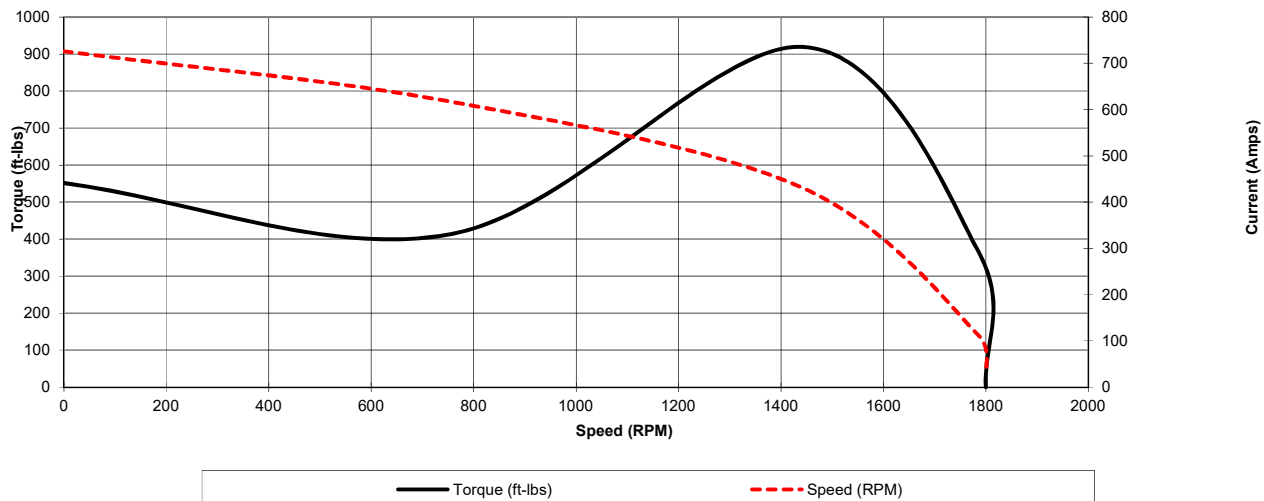

Motor Load Data

