



**PERFORMANCE DATA SHEET
NEMA PREMIUM NR CAN NEMA 12 - 12**

Catalogue #: **MQP-69**

HP	kW	Voltage	S.F. @ 60Hz	EFF.	P.F.	Frame	Design	L.R. Amps
60	44,76	230/460	1,15	92,4%	0,76	405T	B	435

60 Hz							Code	F.L. RPM
208	230	416	460	480	575	600		
/	160	/	80,00	/	/		G	885

50 Hz								
FLA			S.F. @ 50Hz		Efficiency	Power Factor	Code	F.L. RPM
190	380	415						
198,0	94		1,00		90,2%	0,800	E	730


Wgt. Lbs	PH	Duty	Insul. Class	Amb.	Elevation	Temp. Rise° C
1010	3	Cont.	F	40°C	1000M (3,300 Ft)	< 80

% Efficiency		% Power Factor		Torque		Winding Resist. Ω	Safe Cold Start (Secs)
Full Load:	92,4%	Full Load:	0,76	Full Load Ft/Lbs	356,1		
3/4 Load:	92,4%	3/4 Load:	0,70	Locked Rotor %	200		
1/2 Load:	91,5%	1/2 Load:	0,57	Break Down %	245	0	20

Rotor Inertia Wk2 Lb-Ft2	Max Load Inertia Wk2 Lb-Ft2	Shaft Material	Frame Material	DE Bracket Type	ODE Bracket Type	Enclosure	NEMA Rating	Lead Wire Size
30,85	1235	1045	Cast Iron	Cast Iron	Cast Iron	TEFC	IP55	7AWG

Ball Bearings		Grease	Mount Type	Orientation	Paint	Sound Pressure @ 3FT	Sound Power
DE	ODE						
NU318	6314	Mobil PolyrexEm	Rigid	Horizontal	RAL6022	76	82

Inverter Duty, Motor meets MG1 parts 31.4.4.2	VFD SF	Constant Torque Range	Variable Torque Range	Constant HP RPM
	1,00	10:1	20:1	1350

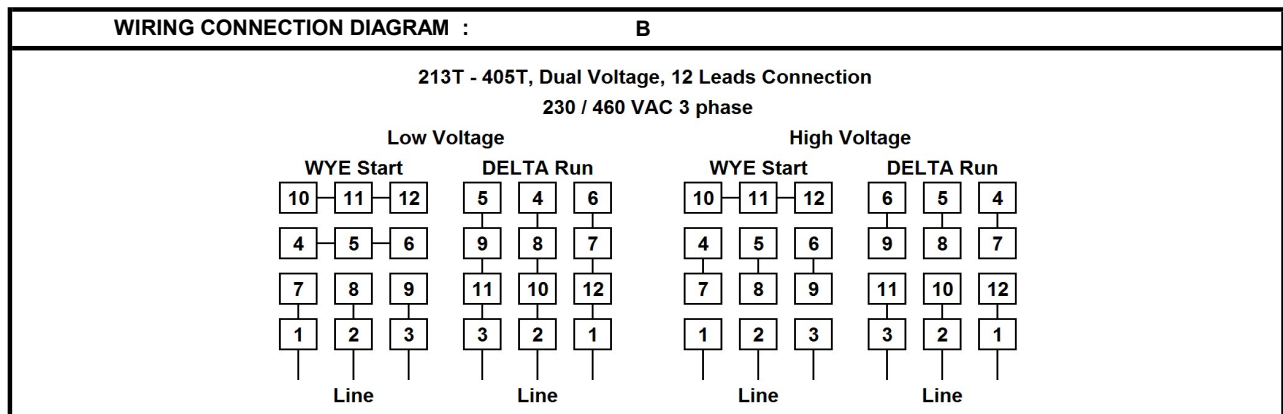


Date: 2023-12-13
 Customer: _____
 Contact: _____
 Submittee: J.C. Lavallée


Catalogue #: MQP-69

NEMA PREMIUM NR CAN NEMA 12 - 12										
HP	VAC	RPM	Enclosure	Frame	Frequency	Design	Poles	LR Code Letter	Insulation Class	Temp. Rise °C
60	460	885	TEFC	405T	60 Hz	B	8	G	F	< 80
	0Hz	6Hz	15Hz	30Hz	45Hz	60 Hz	75Hz	90Hz	105Hz	120Hz
Amps	80	80	80	80	80	80	80	80	80	80
RPM	0	88,5	221,25	442,5	663,75	885	1106,25	1327,5	1548,75	1770
Torq ft.lb	284,85	284,85	356,07	356,07	356,07	356,07	284,85	237,38	203,47	178,03
Peak Tq ft.lb	396,13	792,25	792,25	792,25	792,25	792,25	633,80	528,17	452,71	396,13
HP	0	4,8	15,0	30,0	45,0	60,0	60,0	60,0	60,0	60,0
	Locked Rotor	Pull-Up	Breakdown	Rated Load	Idle	Duty	S. F.	Ambient	Elevation	dBA @ 1M
Speed (RPM)	0,0	378	720	885	900	Continuous	1,15	40°C	3,300 ft	76
Current (Amps)	435,0	369,8	258,8	80,0	30,4	VFD Rating: Meets MG1 parts 31.4.4.2				
Torque (ft.-lbs)	712,1	534,1	872,4	356,1	0,0	C.T.	10:1	V.T.	20:1	VFD SF 1.00

Motor Speed Data

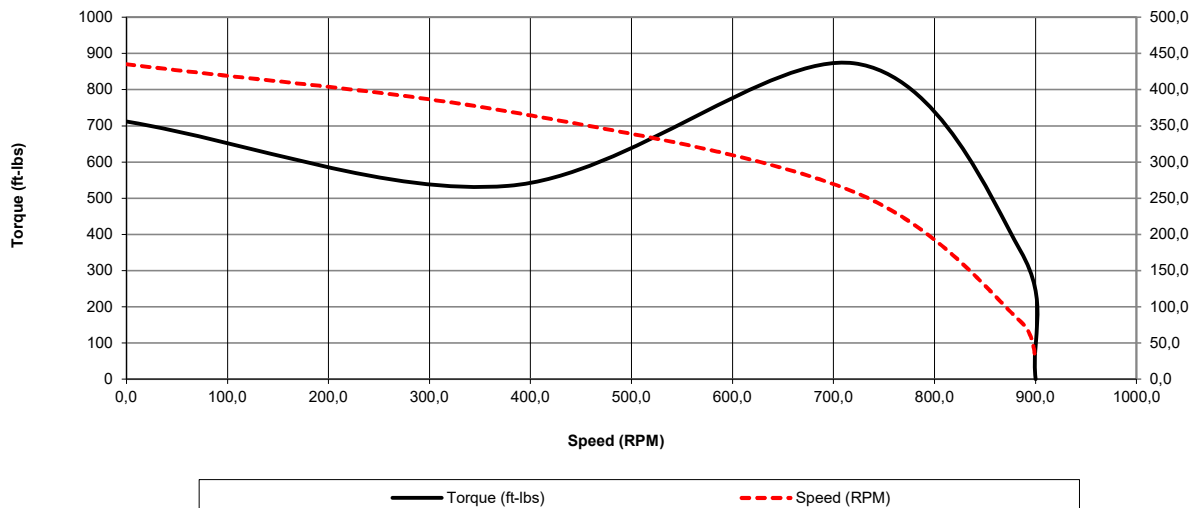

Motor Torque Capability vs RPM

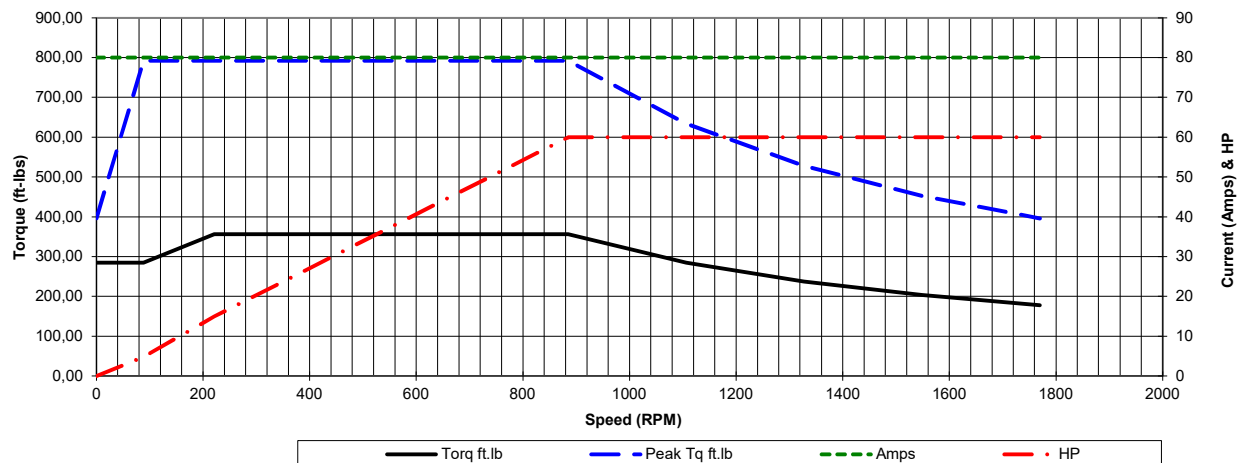

Date: 2023-12-13
 Customer: _____
 Contact: _____
 Submittee: J.C. Lavallée

Catalogue #: MQP-69


NEMA PREMIUM NR CAN NEMA 12 - 12

HP	VAC	RPM	Enclosure	Frame	Frequency	Design	Poles	LR Code Letter	Insulation Class	Temp. Rise °C
60	460	885	TEFC	405T	60 Hz	B	8	G	F	< 80

Load %	0%	25%	50%	75%	100%	125%	150%
Amps	30,40	34,16	47,36	62,48	80,00	100,59	123,64
Torq ft/lbs	0	87,90	176,54	265,92	356,07	446,98	538,67
RPM	0	896,25	892,5	888,75	885	881,25	877,5
Eff	0	83,06	91,50	92,40	92,40	90,95	90,59
PF	0	49,5	57	70	76	76,76	75,24

	Locked Rotor	Pull-Up	Breakdown	Rated Load	Idle	Duty	S. F.	Ambient	Elevation	dBA @ 1M
Speed (RPM)	0	378	720	885	900	Continuous	1,15	40°C	3,300 ft	76
Current (Amps)	435	369,8	258,8	80	30,4	VFD Rating: Meets MG1 parts 31.4.4.2				
Torque (ft-lbs)	712,14	534,10	872,37	356,07	0,0	C.T.	10:1	V.T.	20:1	VFD SF 1.00

Motor Speed Data

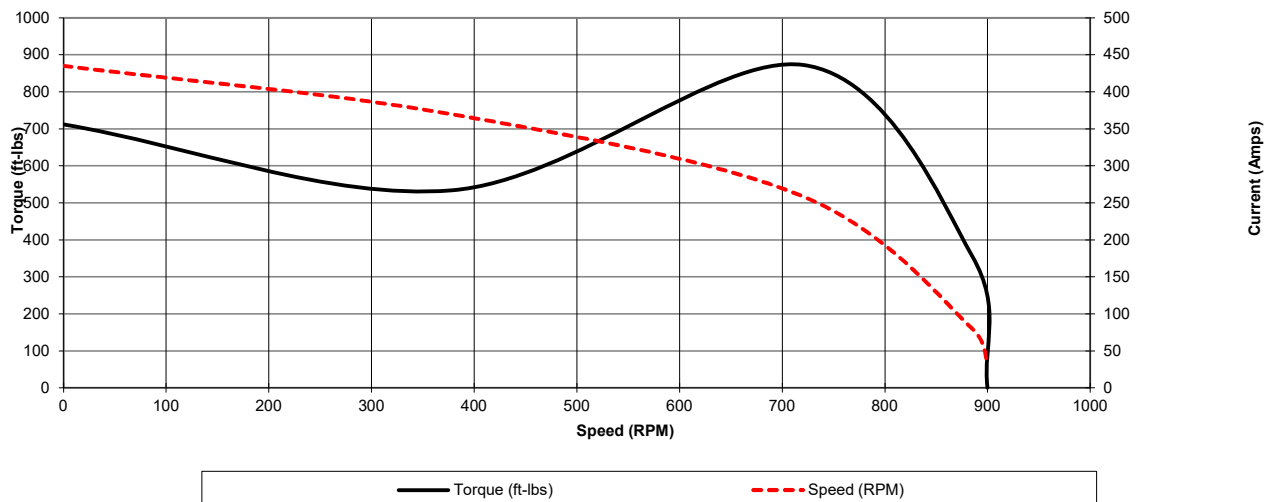

Motor Load Data

