




US Motors Farm Duty

AGRI DUTY HIGH TORQUE C-FACE FOOTED

- Class F Insulation (140-210 Frame)
- 40°C Ambient, Continuous Duty
- Reversible Rotation
- F1 Assembly
- Steel Frames & Steel Welded Based (140-210 Frame)
- Manual Reset Thermal Overload Protector
- Steel Fan Cover & Conduit Box
- Non-Regreasable Double Shielded Bearings
- Shaft Slinger (140-210 Frame)
- Low Temperature Grease

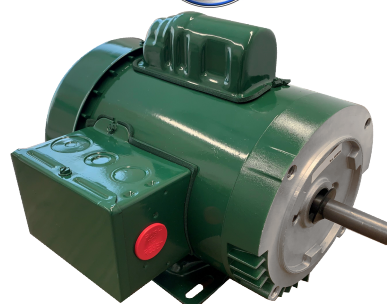

AGRI DUTY HIGH TORQUE C-FACE FOOTED

HP	RPM	Volts	Frame	Overload Protection	Shaft Diameter	Full Load Amps	Catalogue No.
1/3	1725	115/230	56C	MANUAL	5/8"	6.6/3.3	FD13CM2PC
1/2	1725	115/230	56C	MANUAL	5/8"	9.0/4.5	FD12CM2PC
3/4	1725	115/230	56C	MANUAL	5/8"	11.4/5.7	FD34CM2PC
1	1725	115/230	56HC	MANUAL	5/8"	14.0/7.0	FD1CM2PHC
1.5	1725	115/208-230	56HC	MANUAL	5/8"	14.4/8.3-7.2	FD32CPM2PHC
2	1725	115/208-230	56HC	NONE	5/8"	18.9/10.3-9.4	T2C2JHC
2	1725	115/230	145TC	MANUAL	7/8"	18.9/9.4	FD2CM2PHC

AGRI DUTY HIGH TORQUE FOOTED

- Class F Insulation (140-210 Frame)
- 40°C Ambient, Continuous Duty
- Reversible Rotation
- F1 Assembly
- Steel Frames & Steel Welded Based (140-210 Frame)
- Manual Reset Thermal Overload Protector
- Steel Fan Cover & Conduit Box
- Non-Regreasable Double Shielded Bearings
- Shaft Slinger (140-210 Frame)
- Capacitor Start-Capacitor Run (3-10 HP)
- Low Temperature Grease



AGRI DUTY HIGH TORQUE FOOTED

HP	RPM	Volts	Frame	Overload Protection	Shaft Diameter	Full Load Amps	Catalogue No.	C- Flange
2	1725	115/230	56HZ	MANUAL	7/8"	20.0/10.0	FD2CM2PHZ	919757
3	1740	230	184T	MANUAL	1.125"	14.5	FD3CM2K18	362842
5	1740	230	184T	MANUAL	1.125"	22.0	FD5CM2K18	362842
7	1740	230	215T	MANUAL	1.375"	30.0	FD7CM2K21	365033
10	1740	230	215T	MANUAL	1.375"	38.0	FD10CM2K21	365033



US Motors Farm Duty

AGRI DUTY ULTRA HIGH TORQUE C-FACE FOOTED

- Class F Insulation
- 40°C Ambient, Continuous Duty
- Typical Starting Torque 300% Of Full Load
- F1 Assembly
- Extruded Aluminum Frame
- Manual Reset Thermal Overload Protector
- Plastic Fan & Fan Cover
- Double Shielded Bearings w/Low-Temp Grease (Regreasable Shaft End)
- Removable Condensation Drains For Vertical Mounting
- Fully Gasketed Steel Conduit Box
- Die Cast Aluminum Brackets With Steel Bearing Inserts



AGRI DUTY ULTRA HIGH TORQUE C-FACE FOOTED

HP	RPM	Volts	Frame	Full Load Amps	Catalogue No.
3	1760	208/230	184TC	16.4/17.0	FDU3CM2K18C
5	1740	208/230	184TC	22.2/24.0	FDU5CM2K18C
7.5	1715	230	215TC	30.8	FDU7CM2K21C
7.5	1715	230	213TCYZ	30.8	FDU7CM2K21ZC
10	1735	230	215TC	41.0	FDU10CM2K21C

AGRI DUTY ULTRA HIGH TORQUE FOOTED

- Class F Insulation
- 40°C Ambient, Continuous Duty
- Typical Starting Torque 300% Of Full Load
- F1 Assembly
- Extruded Aluminum Fram
- Manual Reset Thermal Overload Protector
- Plastic Fan & Fan Cover
- Double Shielded Bearings w/Low-Temp Grease (Regreasable Shaft End)
- Removable Condensation Drains For Vertical Mounting
- Fully Gasketed Steel Conduit Box
- Die Cast Aluminum Brackets With Steel Bearing Inserts



AGRI DUTY HIGH TORQUE FOOTED

HP	RPM	Volts	Frame	Shaft Diameter	Full Load Amps	Catalogue No.	C Flange
7.5	1715	230	215TZ	1.125"	30.8	FDU7CM2K21Z	365033
7.5	1715	230	215T	1.375"	30.8	FDU7CM2K21	365033
10	1735	230	215T	1.375"	41.0	FDU10CM2K21	365033