



ELP10P1D

Starting torque and current curves

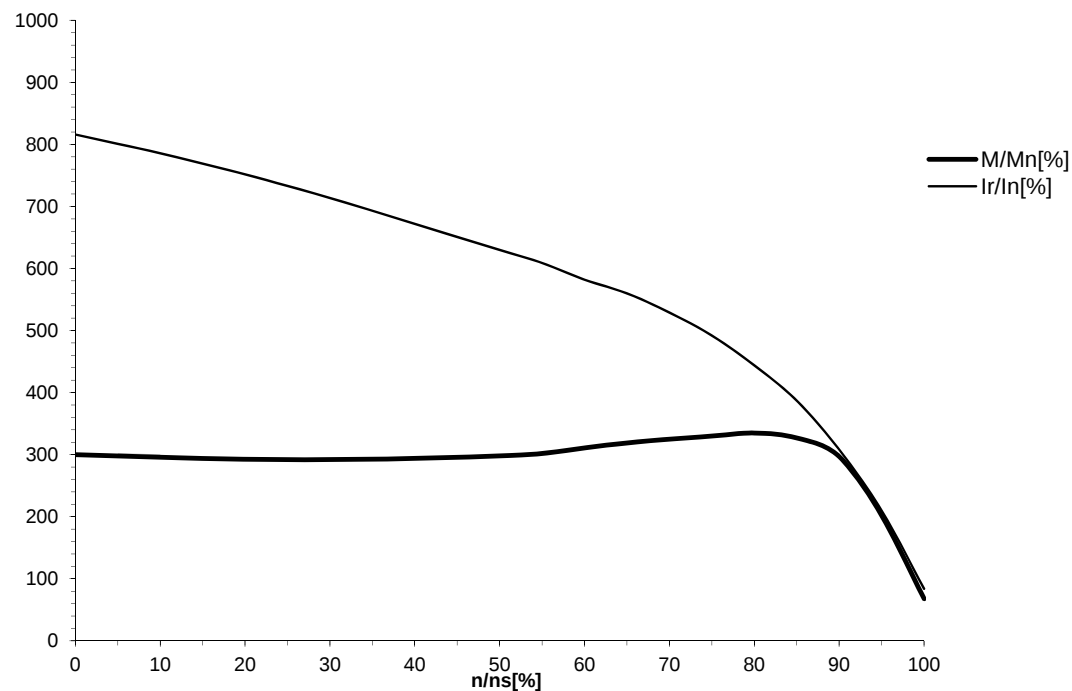


cos

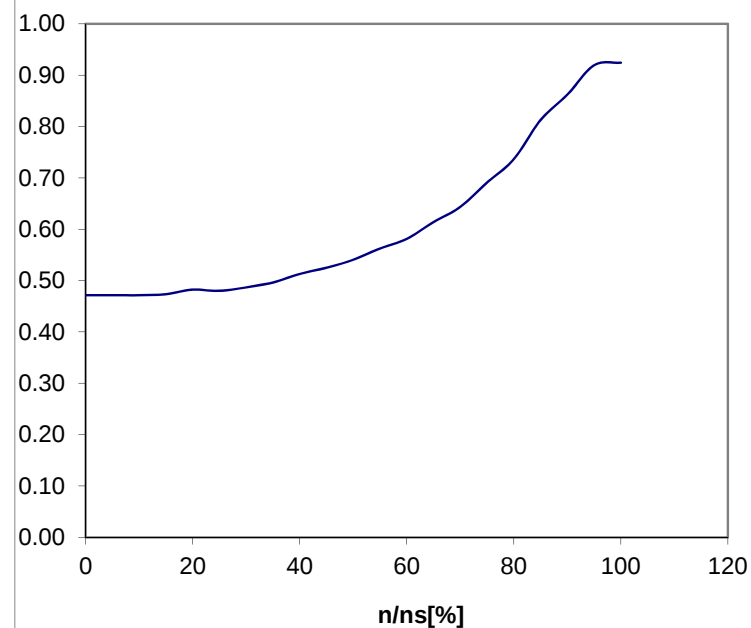

n/ns[%]	0	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
I/In[%]	816	801	786	769	752	733	714	693	672	651	630	609	582	560	529	492	444	387	308	210	84
M/Mn[%]	300	298	296	294	293	292	292	293	294	296	298	302	311	319	325	330	335	327	297	202	68
cos	0.47	0.47	0.47	0.47	0.48	0.48	0.49	0.50	0.51	0.53	0.54	0.56	0.58	0.61	0.64	0.69	0.74	0.81	0.86	0.92	0.92

Disclaimer: These Graph Datas are Typical unless noted otherwise.

ELP10P1D

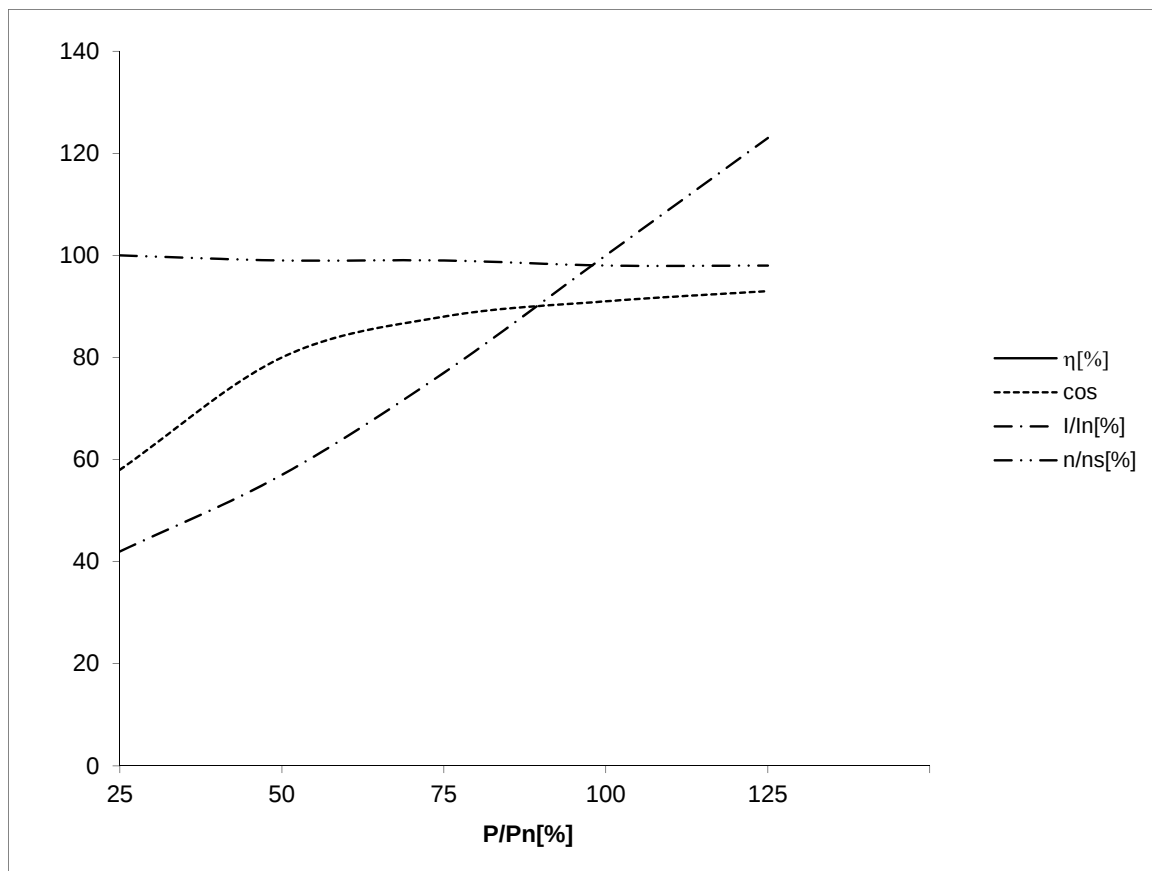

P/Pn[%]	25	50	75	100	125
h[%]	83.5	89.3	90.4	90.2	89.6
cosφ[%]	58	80	88	91	93
I/In[%]	42	57	77	100	123
n/ns[%]	100	99	99	98	98

Disclaimer: These Graph Datas are Typical unless noted otherwise.