



ELP15P2D

Starting torque and current curves

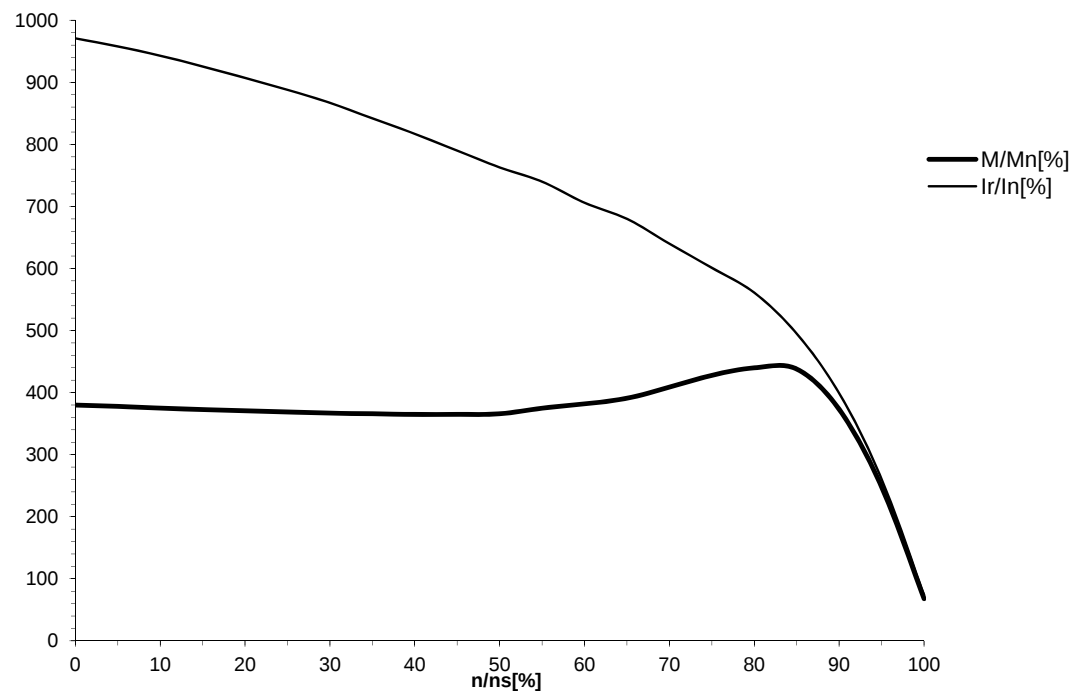


cos

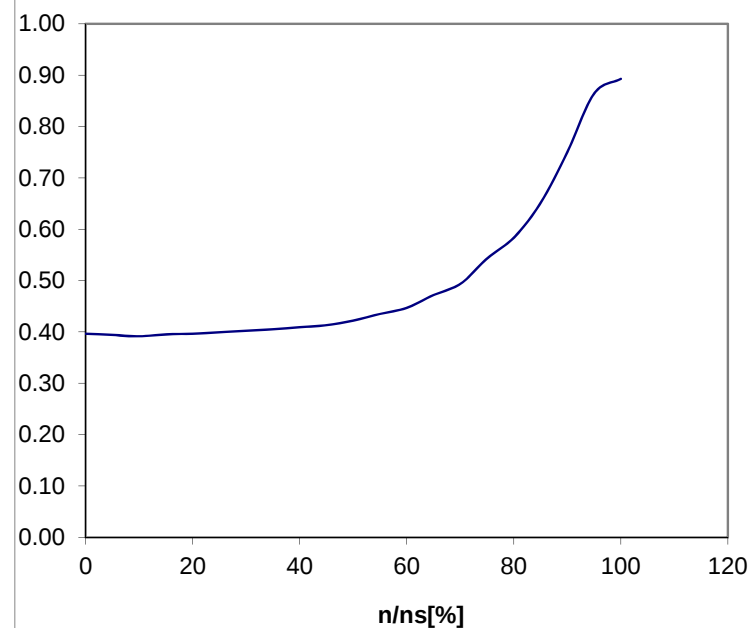

n/ns[%]	0	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
I/In[%]	971	958	943	926	907	888	867	842	817	790	763	740	706	680	640	601	561	495	399	261	74
M/Mn[%]	380	378	375	373	371	369	367	366	365	365	366	375	382	391	409	428	440	438	373	248	68
cos	0.40	0.39	0.39	0.40	0.40	0.40	0.40	0.41	0.41	0.41	0.42	0.44	0.45	0.47	0.49	0.54	0.58	0.65	0.75	0.86	0.89

Disclaimer: These Graph Datas are Typical unless noted otherwise.

ELP15P2D

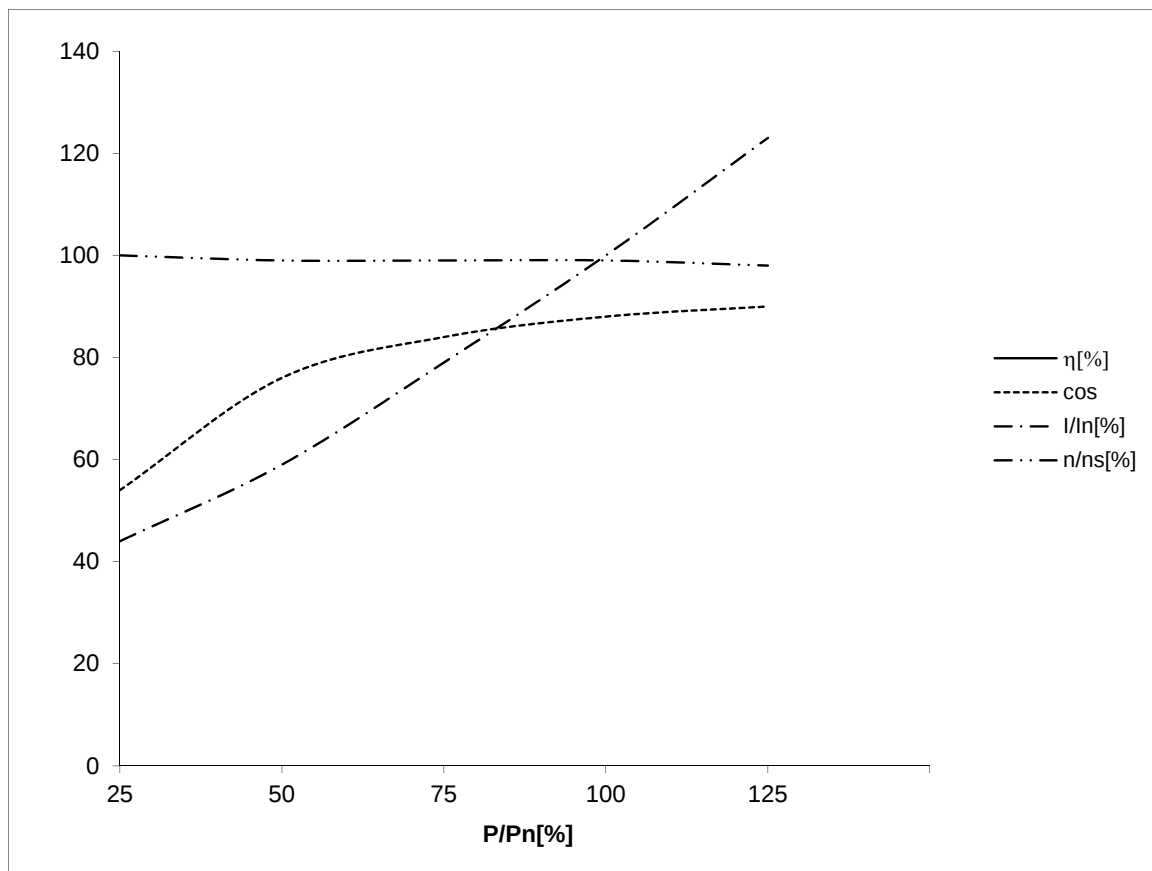

P/Pn[%]	25	50	75	100	125
h[%]	84.8	90.7	92.0	92.4	91.9
cosφ[%]	54	76	84	88	90
I/In[%]	44	59	79	100	123
n/ns[%]	100	99	99	99	98

Disclaimer: These Graph Datas are Typical unless noted otherwise.