



ELP20P2D

Starting torque and current curves

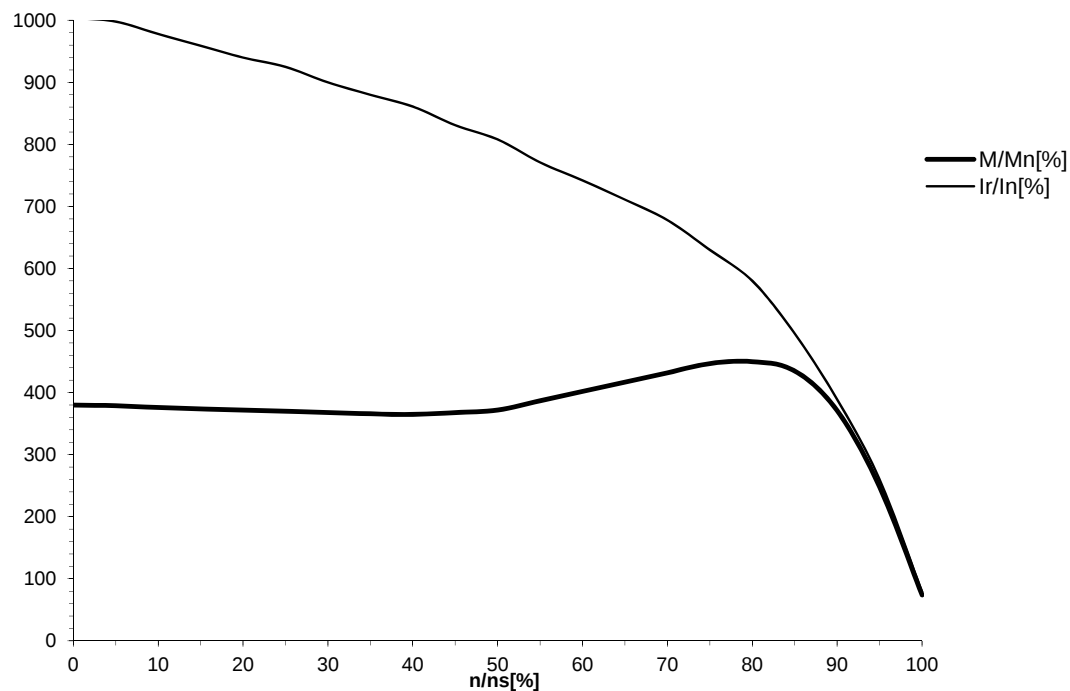


cos

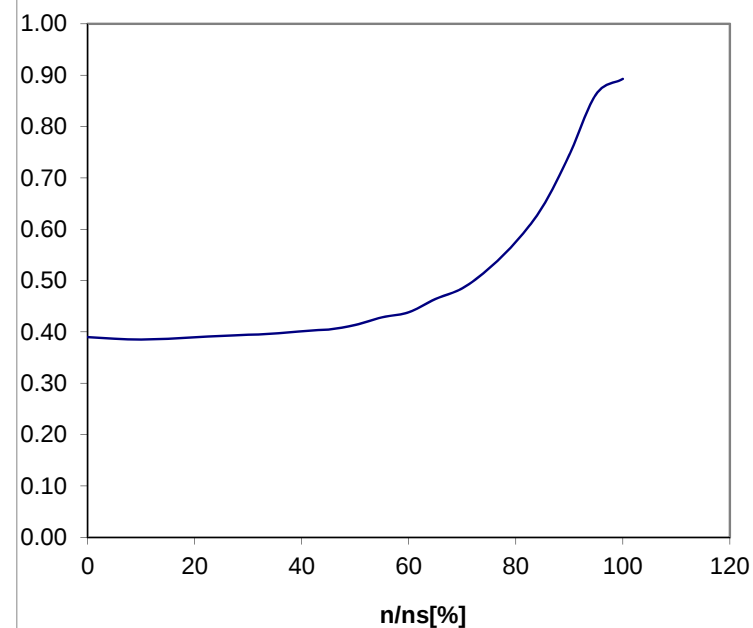

n/ns[%]	0	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
I/In[%]	1004	998	978	959	940	925	900	880	861	831	808	771	742	711	678	630	580	495	389	260	79
M/Mn[%]	380	379	376	374	372	370	368	366	365	368	372	387	402	417	432	447	450	435	371	248	74
cos	0.39	0.39	0.38	0.39	0.39	0.39	0.39	0.40	0.40	0.40	0.41	0.43	0.44	0.46	0.49	0.52	0.58	0.64	0.74	0.86	0.89

Disclaimer: These Graph Datas are Typical unless noted otherwise.

ELP20P2D

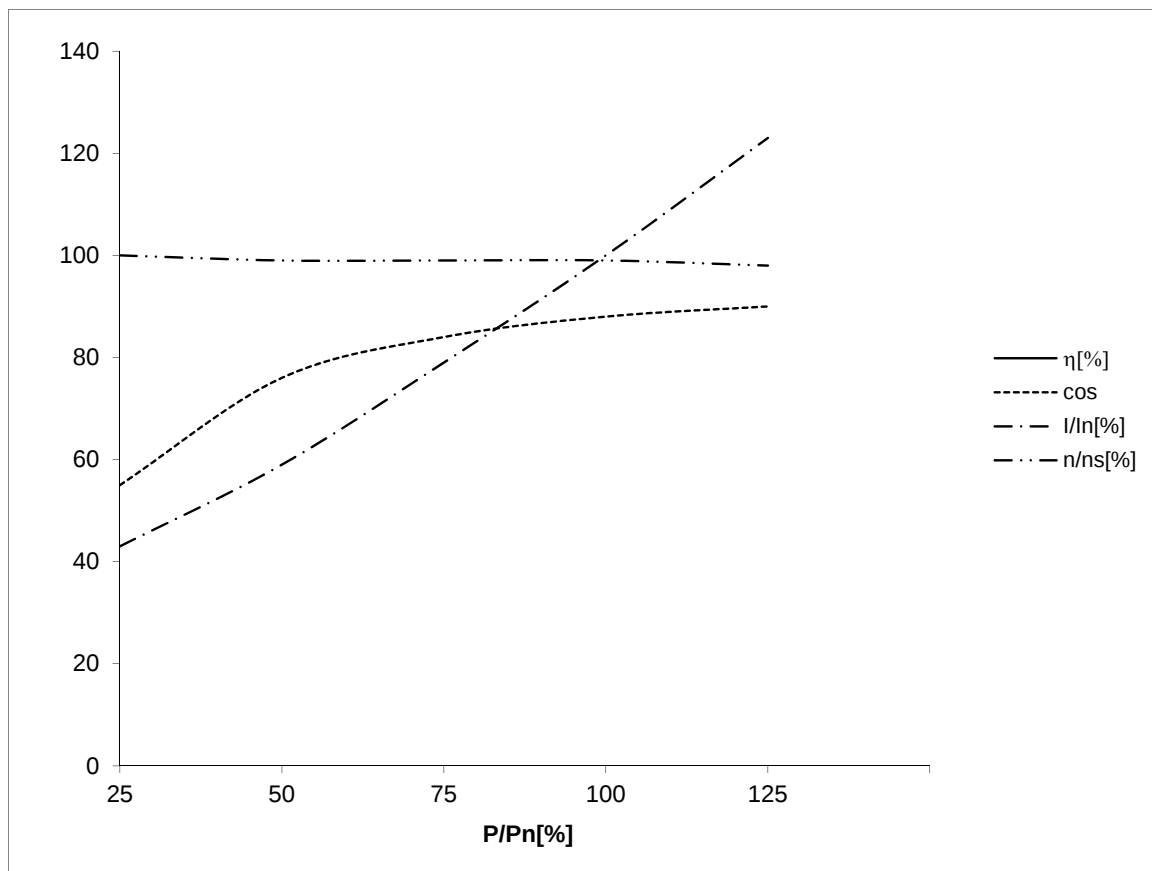

P/Pn[%]	25	50	75	100	125
h[%]	85.9	91.4	92.7	93.0	92.7
cosφ[%]	55	76	84	88	90
I/In[%]	43	59	79	100	123
n/ns[%]	100	99	99	99	98

Disclaimer: These Graph Datas are Typical unless noted otherwise.