



ELP25P2D

Starting torque and current curves

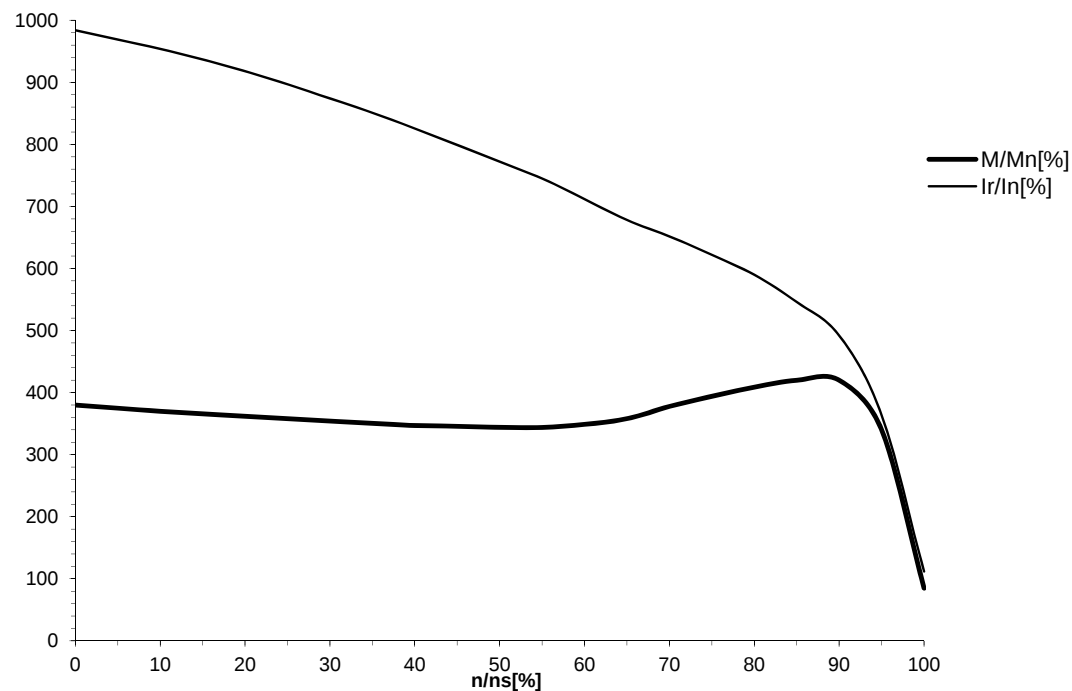


cos

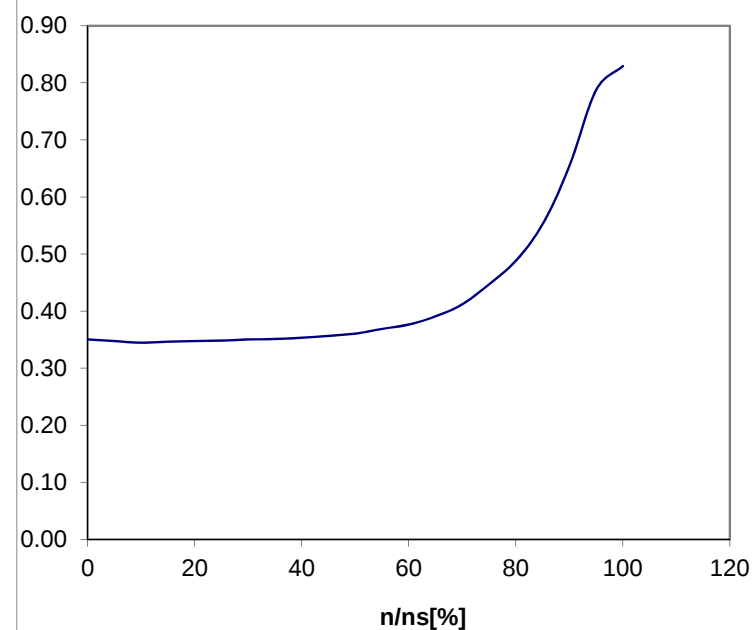

n/ns[%]	0	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
I/In[%]	984	969	954	937	918	897	874	851	826	799	772	745	712	678	652	622	590	546	492	364	112
M/Mn[%]	380	375	370	366	362	358	354	351	347	346	344	344	349	358	378	394	409	420	420	340	85
cos	0.35	0.35	0.34	0.35	0.35	0.35	0.35	0.35	0.35	0.36	0.36	0.37	0.38	0.39	0.41	0.45	0.49	0.55	0.65	0.79	0.83

Disclaimer: These Graph Datas are Typical unless noted otherwise.

ELP25P2D

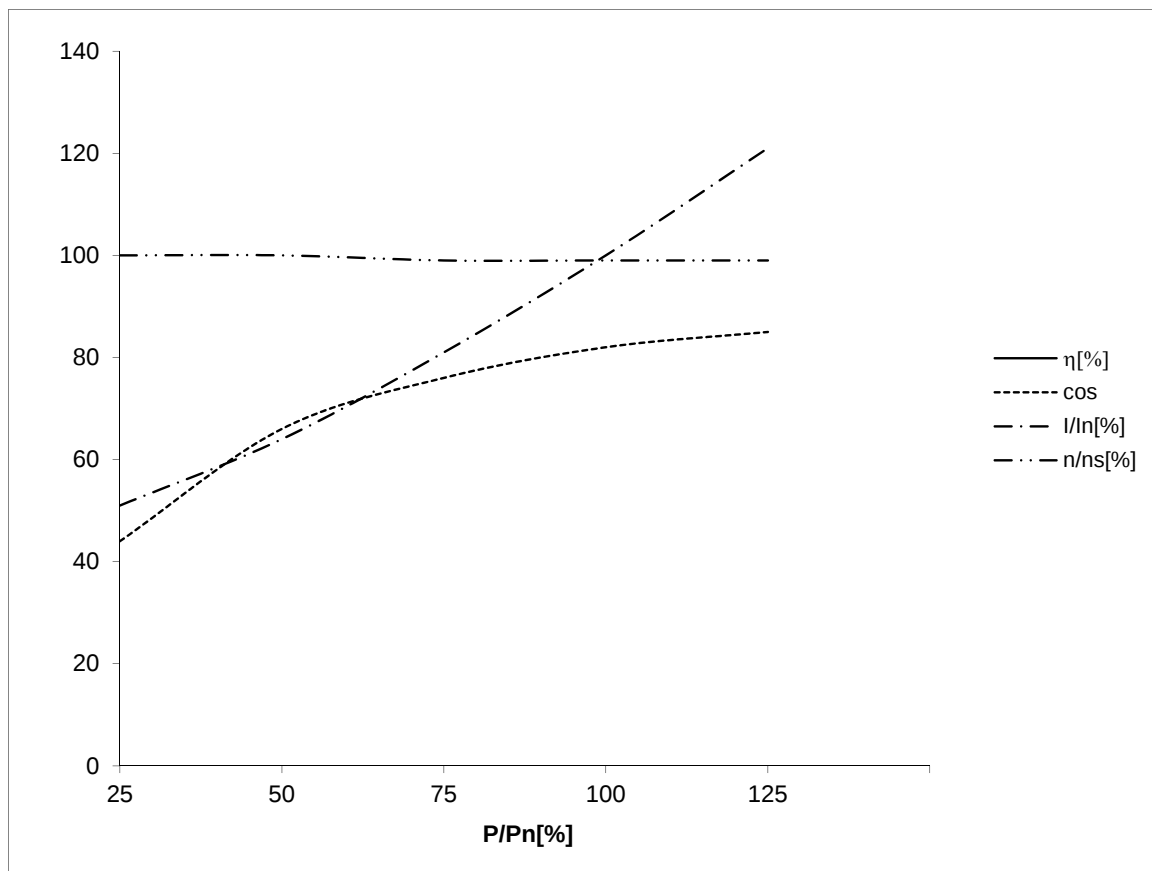

P/Pn[%]	25	50	75	100	125
h[%]	85.6	91.6	93.1	93.6	93.5
cosφ[%]	44	66	76	82	85
I/In[%]	51	64	81	100	121
n/ns[%]	100	100	99	99	99

Disclaimer: These Graph Datas are Typical unless noted otherwise.