



ELP2P3D

Starting torque and current curves

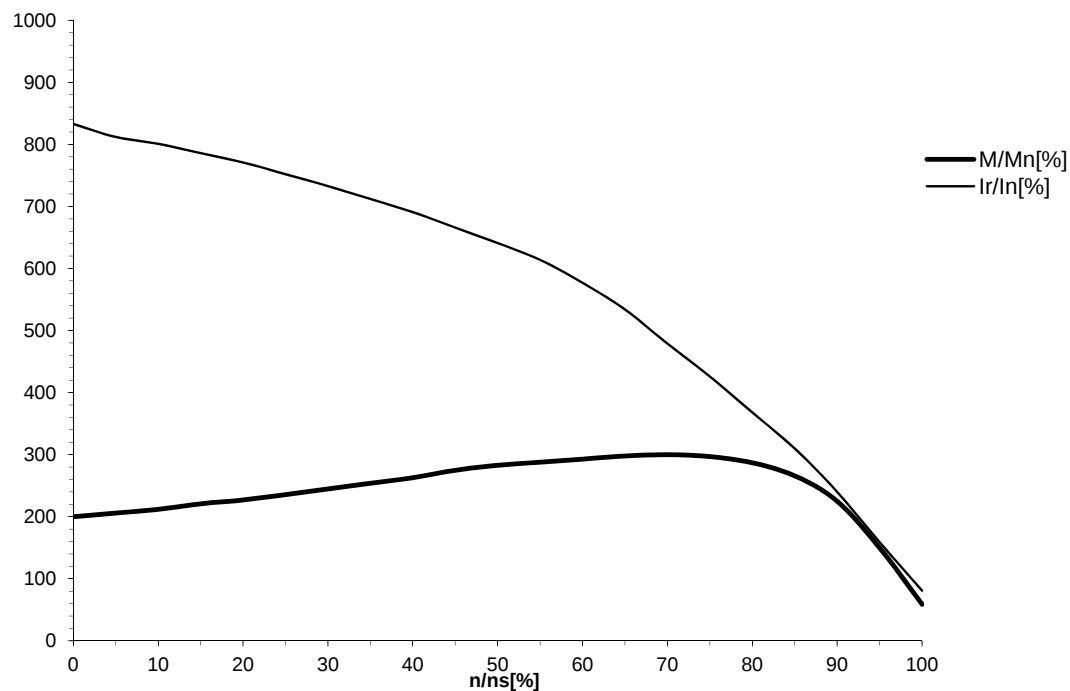


cos

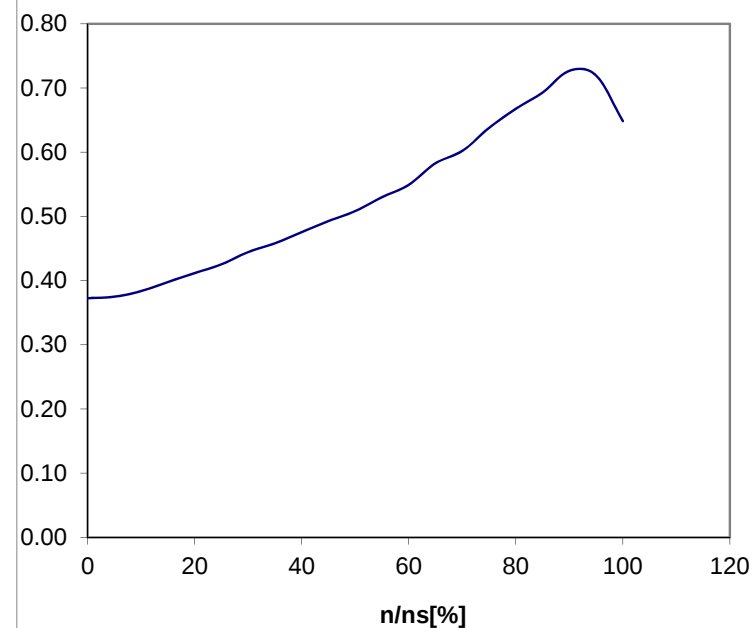

n/ns[%]	0	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
I/In[%]	833	812	801	786	771	752	733	712	691	666	641	614	577	534	479	426	368	310	240	159	81
M/Mn[%]	200	206	212	221	227	236	245	254	263	275	283	288	293	298	300	297	287	266	225	150	59
cos	0.37	0.38	0.38	0.40	0.41	0.43	0.44	0.46	0.48	0.49	0.51	0.53	0.55	0.58	0.60	0.64	0.67	0.69	0.73	0.72	0.65

Disclaimer: These Graph Datas are Typical unless noted otherwise.

ELP2P3D

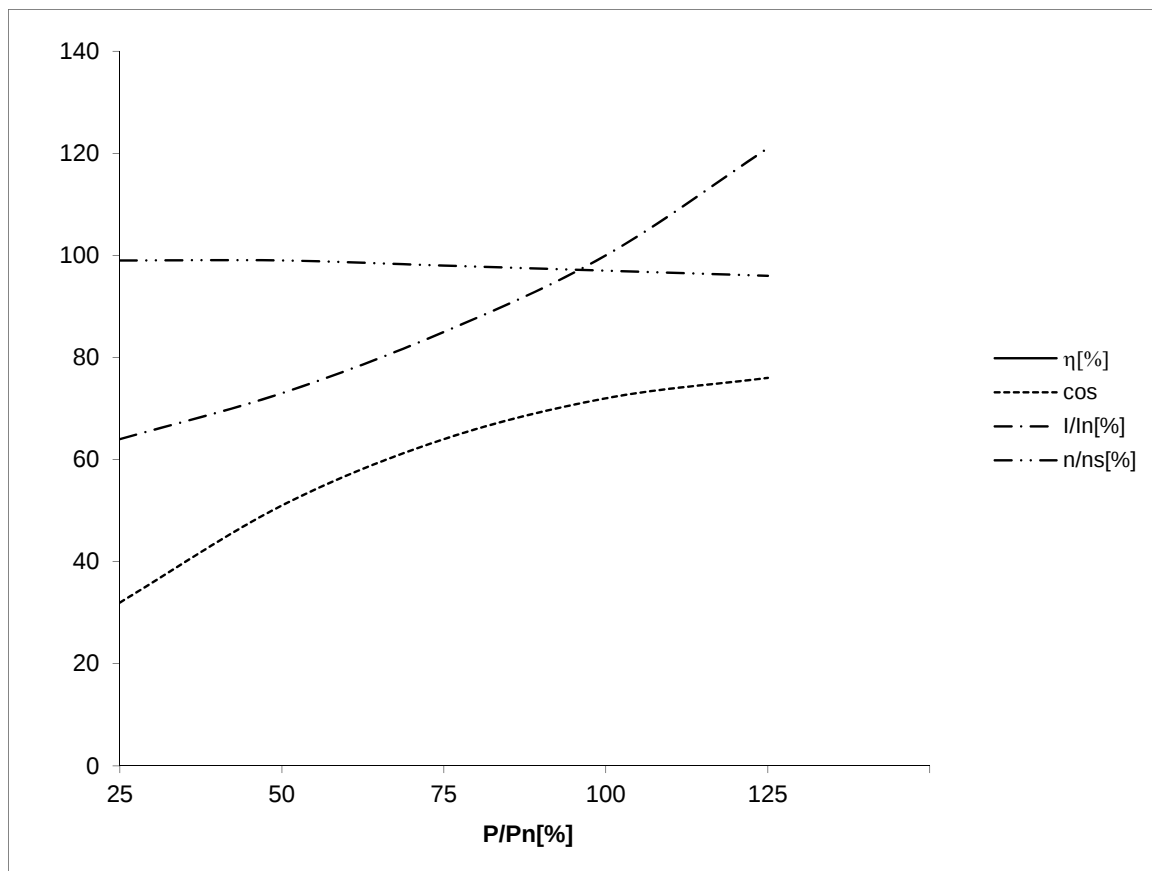

P/Pn[%]	25	50	75	100	125
h[%]	79.3	86.9	88.6	88.5	87.5
cosφ[%]	32	51	64	72	76
I/In[%]	64	73	85	100	121
n/ns[%]	99	99	98	97	96

Disclaimer: These Graph Datas are Typical unless noted otherwise.