



ELP32P2D

Starting torque and current curves

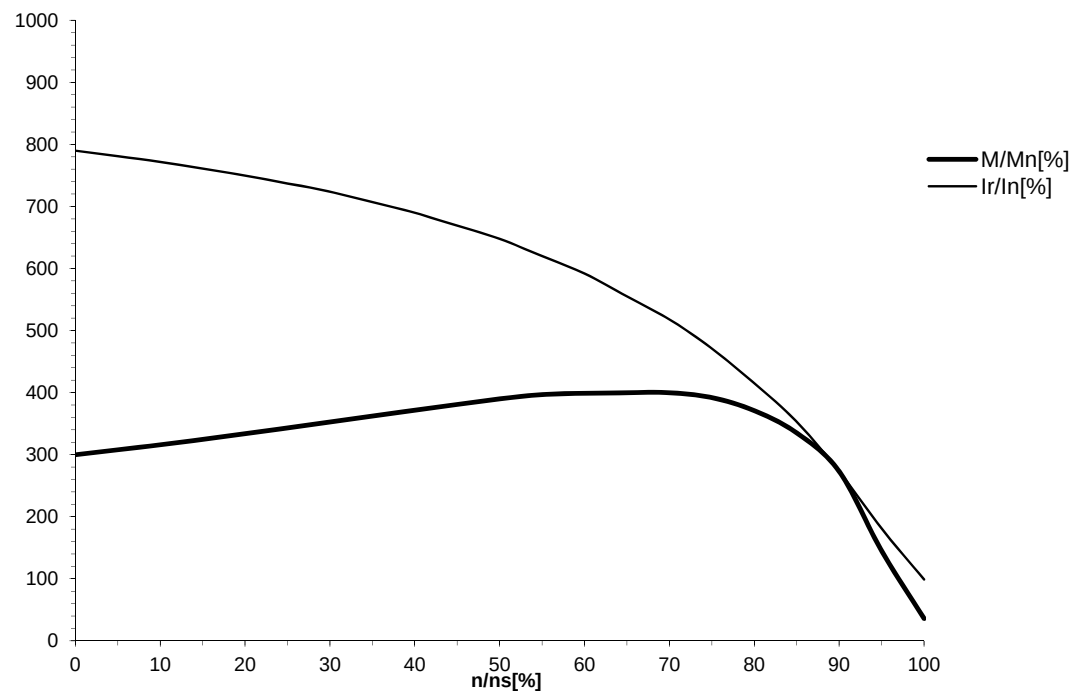


cos

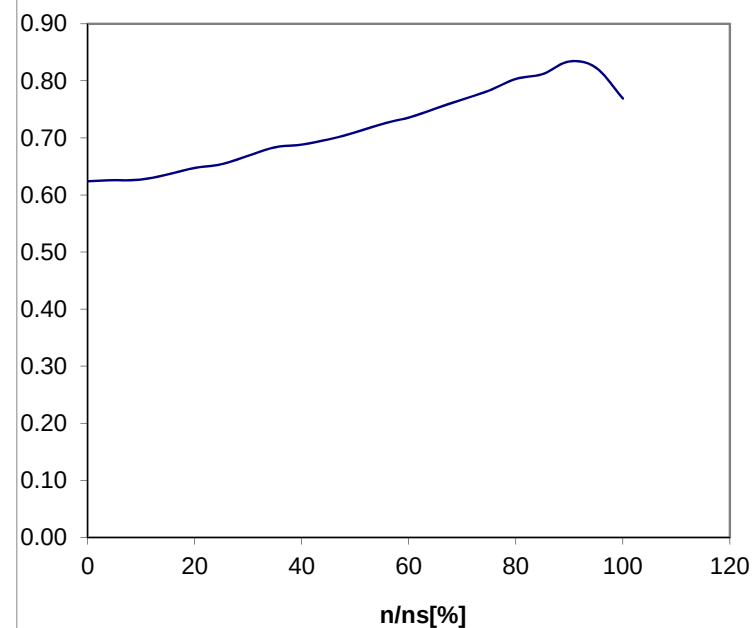

n/ns[%]	0	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
I/I _n [%]	790	781	772	761	750	737	724	707	690	669	648	620	592	555	518	471	415	353	273	181	99
M/M _n [%]	300	308	316	325	334	343	353	362	372	381	390	397	399	400	400	392	371	335	273	145	36
cos	0.62	0.63	0.63	0.64	0.65	0.65	0.67	0.68	0.69	0.70	0.71	0.72	0.74	0.75	0.77	0.78	0.80	0.81	0.83	0.82	0.77

Disclaimer: These Graph Datas are Typical unless noted otherwise.

ELP32P2D

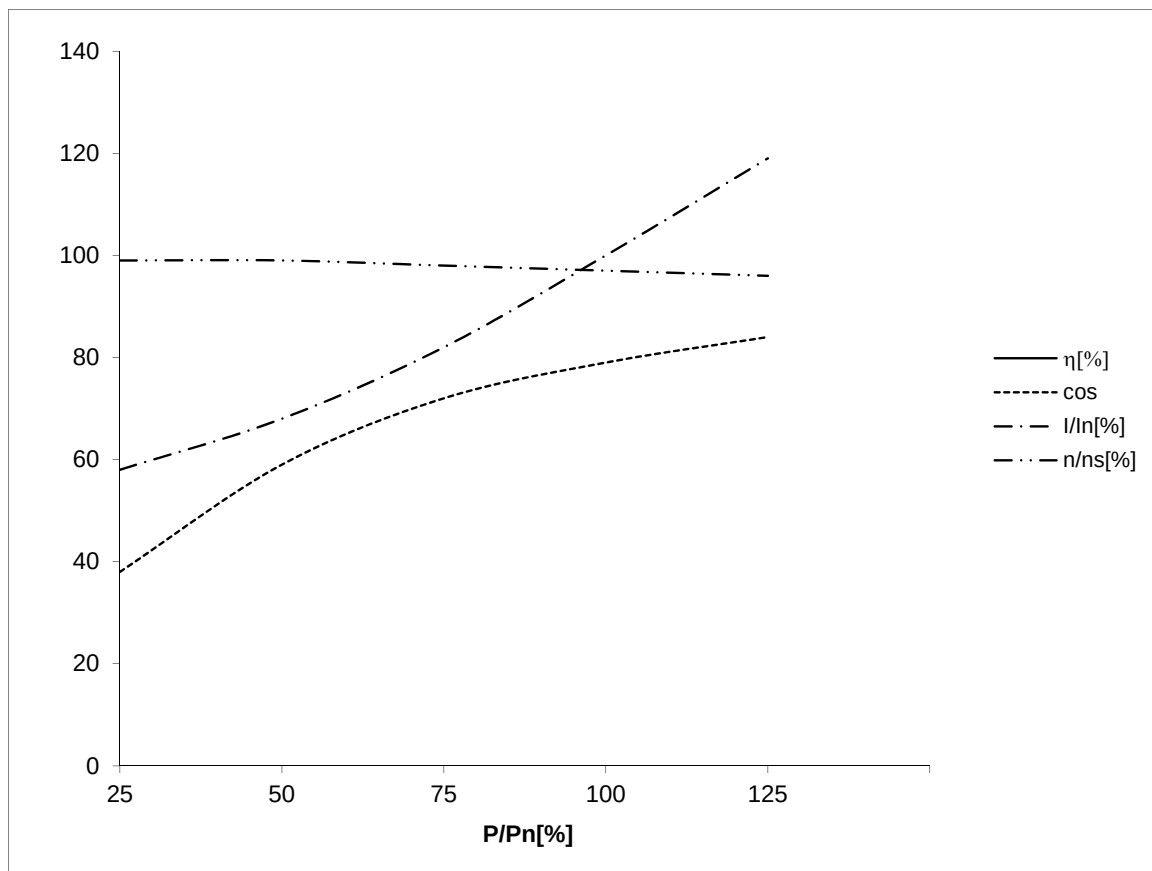

P/Pn[%]	25	50	75	100	125
η [%]	77.1	85.0	86.8	86.5	86.3
cos ϕ [%]	38	59	72	79	84
I/In[%]	58	68	82	100	119
n/ns[%]	99	99	98	97	96

Disclaimer: These Graph Datas are Typical unless noted otherwise.