



ELP5P2G

Starting torque and current curves

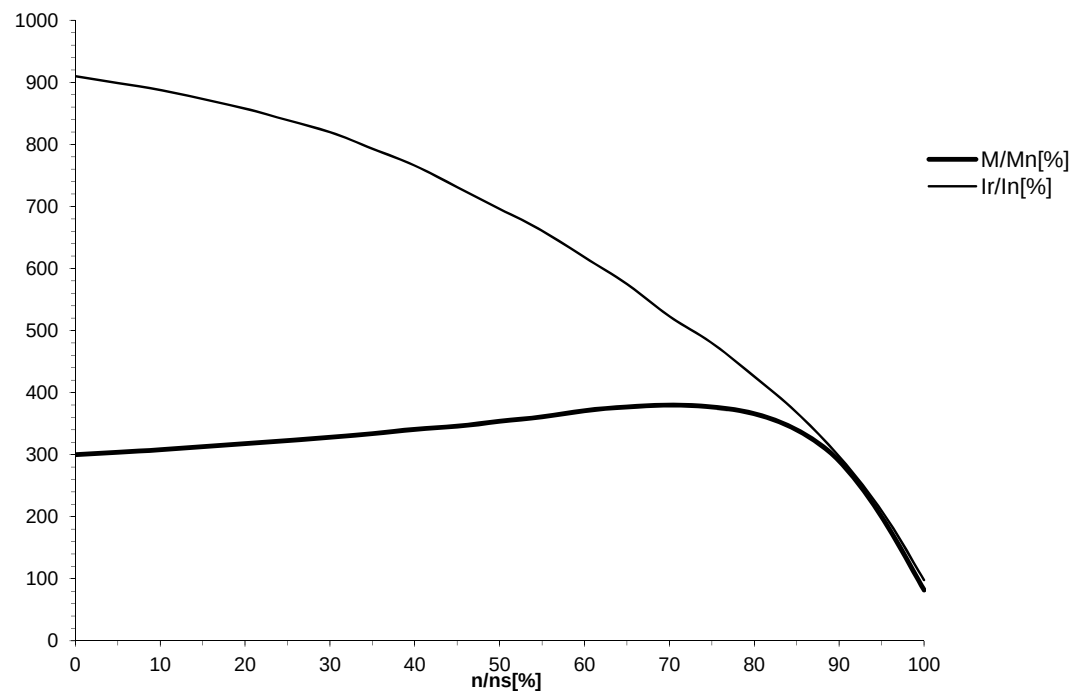


cos

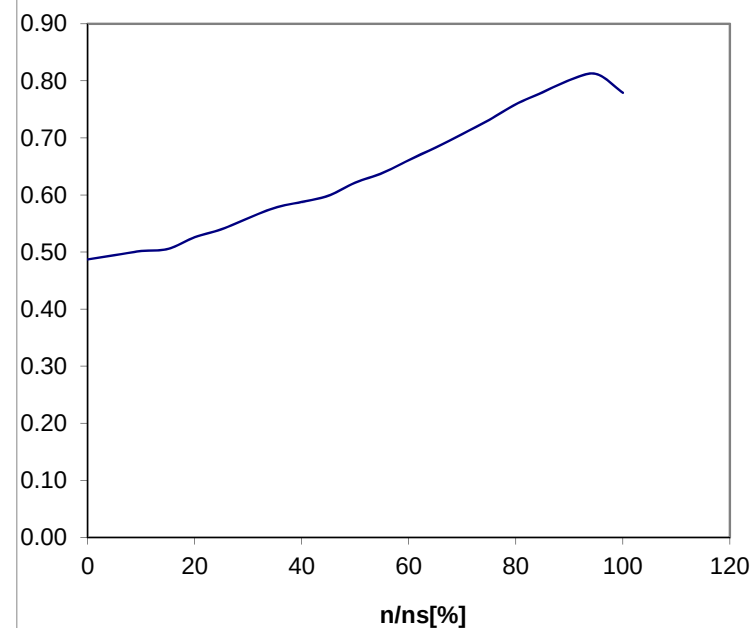

n/ns[%]	0	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
I/In[%]	910	899	888	873	858	839	820	793	766	731	696	661	618	575	523	480	426	368	297	210	98
M/Mn[%]	300	304	308	313	318	323	328	334	341	346	354	361	371	377	380	377	366	340	290	200	82
cos	0.49	0.49	0.50	0.51	0.53	0.54	0.56	0.58	0.59	0.60	0.62	0.64	0.66	0.68	0.71	0.73	0.76	0.78	0.80	0.81	0.78

Disclaimer: These Graph Datas are Typical unless noted otherwise.

ELP5P2G

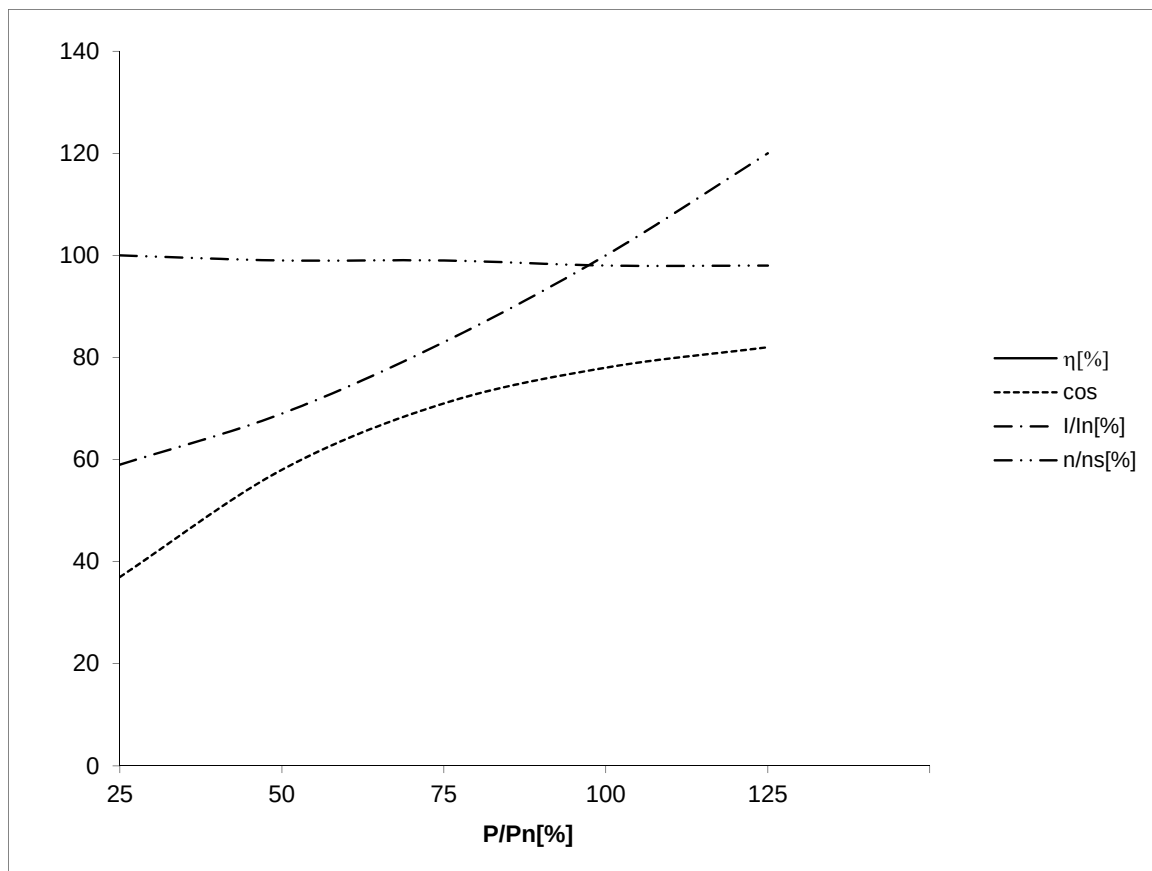

P/Pn[%]	25	50	75	100	125
h[%]	80.6	87.6	89.2	89.5	89.0
cosf[%]	37	58	71	78	82
I/In[%]	59	69	83	100	120
n/ns[%]	100	99	99	98	98

Disclaimer: These Graph Datas are Typical unless noted otherwise.