



ELP7P2G

Starting torque and current curves

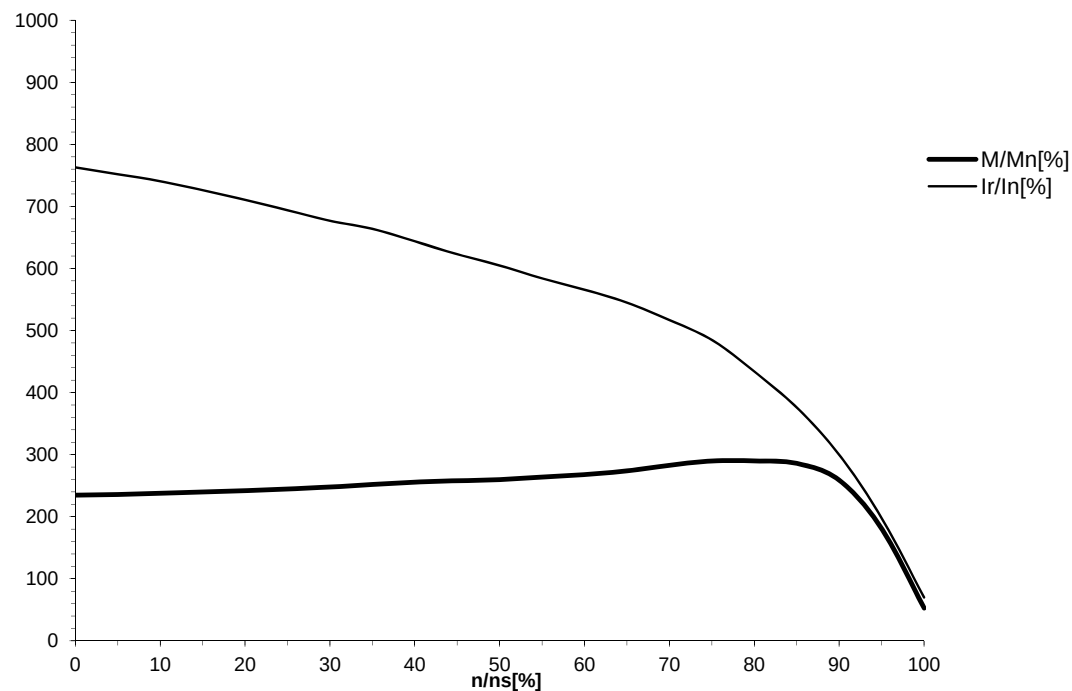


cos

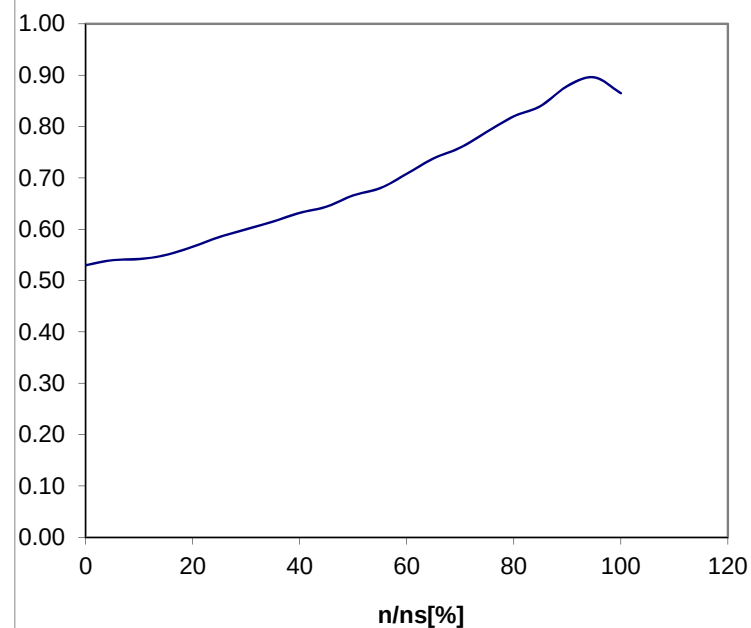

n/ns[%]	0	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
I/I _n [%]	763	752	741	726	711	694	677	664	644	623	605	584	566	545	517	485	434	376	300	198	70
M/M _n [%]	235	236	238	240	242	245	248	252	256	258	260	264	268	274	283	290	290	286	259	181	53
cos	0.53	0.54	0.54	0.55	0.57	0.59	0.60	0.62	0.63	0.64	0.67	0.68	0.71	0.74	0.76	0.79	0.82	0.84	0.88	0.90	0.87

Disclaimer: These Graph Datas are Typical unless noted otherwise.

ELP7P2G

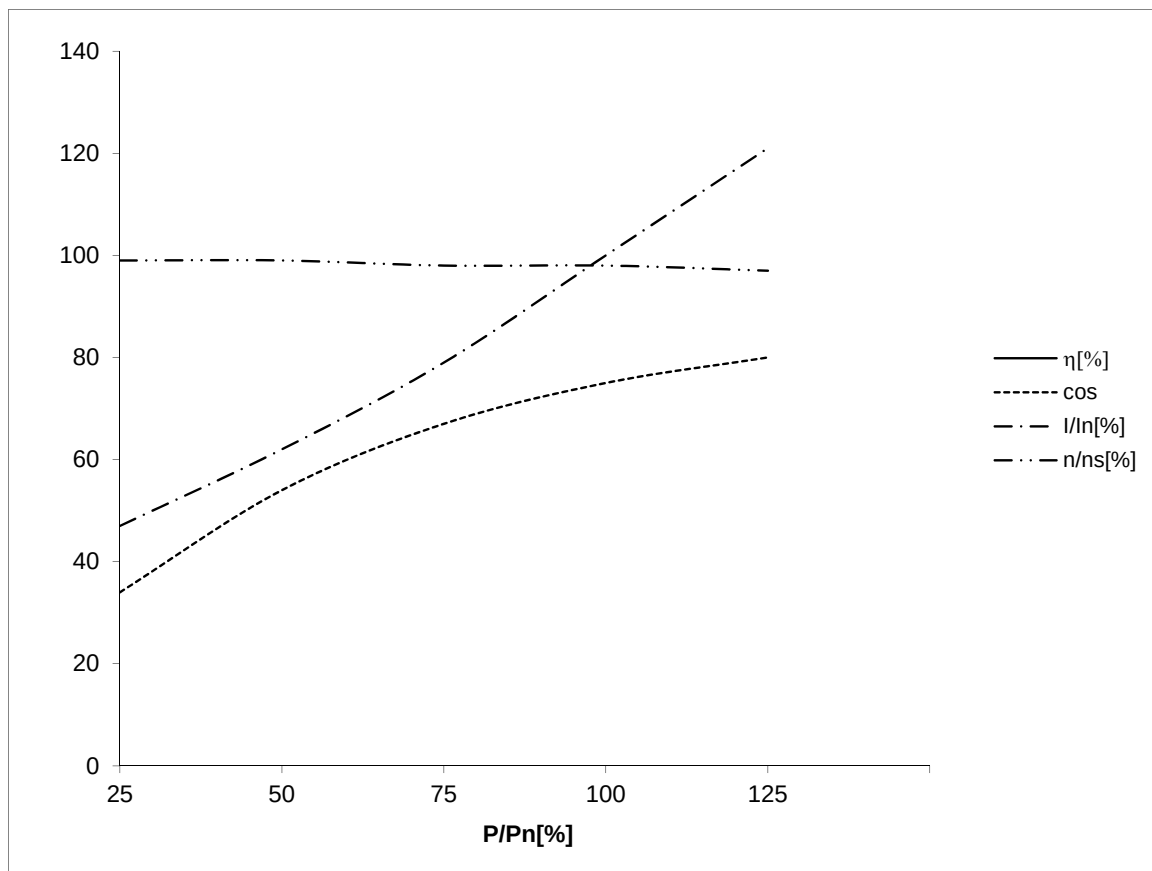

P/Pn[%]	25	50	75	100	125
η [%]	77.1	85.8	88.5	89.5	89.6
cosf[%]	34	54	67	75	80
I/In[%]	47	62	79	100	121
n/ns[%]	99	99	98	98	97

Disclaimer: These Graph Datas are Typical unless noted otherwise.