




Catalog #: N11969

MODEL NUMBER:	B1881820800000B
CATALOG NUMBER:	N11969
PHASE TYPE:	1_PERM SPLIT CAP
MOTOR ENCLOSURE:	OA0
HORSEPOWER:	1/8
POLES:	2
NUMBER SPEEDS:	2
RPM:	3450
HERTZ:	60
VOLTS PRIMARY:	115
VOLTS:	115
MOTOR TYPE:	FHP
OPPOSITE END BEARING:	Ball
SHAFT END BEARING:	Ball
ROTATION:	CCWSE
SERVICE FACTOR:	1
RUNCAPMFD:	10uF
RUNCAPVOLTS:	370VAC
THERMAL PROTECTION:	AUTOMATIC RESET
INSULATION CLASS:	B
FULL LOAD AMPS PRIMARY:	2
CFM @ FREE AIR:	97.01

MODEL	HP	VOLTS	AMPS	ROTATION	DESCRIPTION/REMARKS
B188182080000B	1/8	115V	1.7	CCWSE	PALLET QTY 42
BLOWER SPECIFICATIONS					
CAT #	N11969	ROTATION	CCWSE		
HP	1/8	BEARING TYPE	BALL BEARING		
VOLTS	115V	MOTOR TYPE	PSC		
HERTZ	60HZ	PROTECTOR	AUTO		
SPEEDS	2 (HI/LOW)	PHASE	SINGLE		
AMPS	1.7	INSULATION CLASS	B		
RPM	3450	CFM	97.01/54.21@FREE AIR		
CAPACITOR	10uF/370VAC				

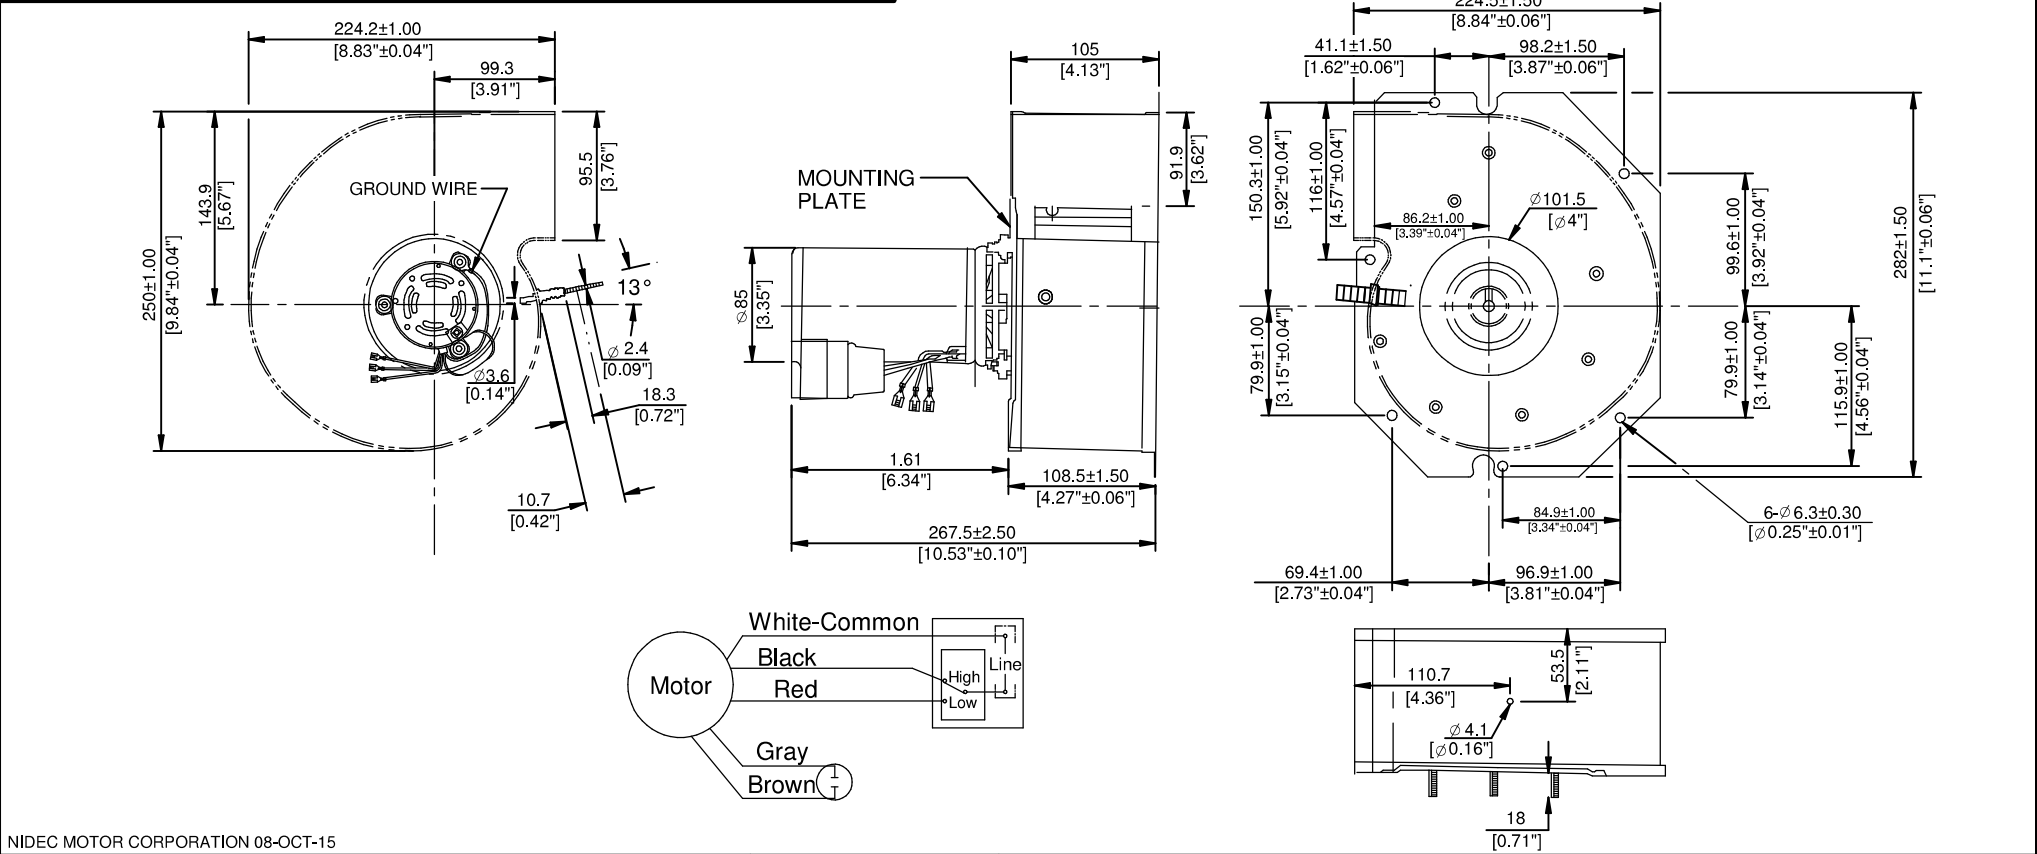

NIDEC MOTOR CORPORATION 08-OCT-15					
REVISION RECORD FOR: ECO E31987					
CHANGE THE CARTON LABEL AND ADDED THE NAMEPLATE ON PAGE 2					
TOLERANCES ON DIMENSIONS (UNLESS OTHERWISE SPECIFIED)					
INCHES .XX = ± .010 .XXX = ± .005					
mm					
ANGLES X° = ±1°					
NIDEC MOTOR CORPORATION					
INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION					
REVISION DATE: 23-AUG-18					
TITLE: CUSTOMER DETAIL DRAWING					
CODE: V02					
ITEM NO.: 820443					
REV: A					
SHEET NUMBER: 1 OF 2					
DWG SIZE: B					